


Color: ■ black

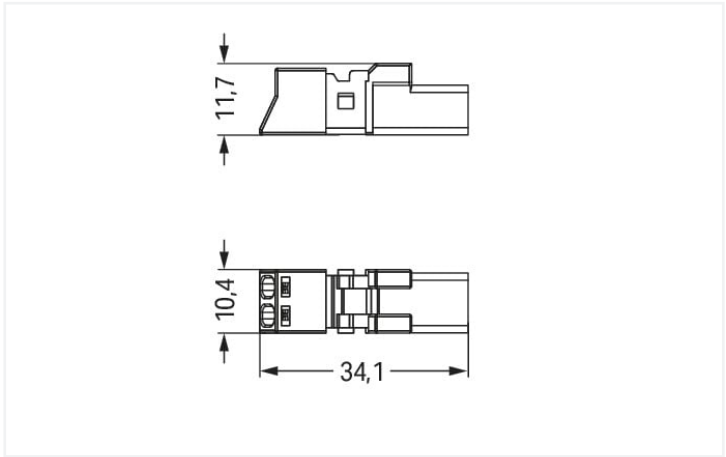

Dimensions in mm

Male connector/plug WINSTA® MINI A coding

For power and signal transmission: The WINSTA® MINI male connector/plug 2-pole. Our pluggable installation connectors with spring pressure connection technology work completely without screw connections. They allow resource-efficient, error-free installation in numerous possible uses. The color coding and mechanical coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismatching. Thanks to the color coding and mechanical A coding of WINSTA® MINI pluggable installation connectors, you can clearly distinguish different circuits. Due to its particularly compact dimensions, our WINSTA® MINI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology is very suitable in very restricted spaces, i.e., for installations when very little room is available.

WINSTA® MINI solutions for your electrical installation – protected against mismatching and maintenance-free

WINSTA® is the pluggable connection system that is optimally tailored to the strict requirements of electrical installation. It ensures error-free installation of cables and components, quickly and reliably. Choose quality and durability – with marking from WAGO makes the installation of electrical components significantly easier.

- protection against mismatching eliminates errors
- easy tool-free operation, a wide range of coding options
- for any mains application
- flexible installation to save space
- convenient installation and commissioning

Electrical data								
Ratings per		IEC/EN 60664-1			Approvals per		UL 1977	
Overvoltage category		III	III	II	Rated voltage		600 V	
Pollution degree		3	2	2	Rated current		14 A	
Nominal voltage		250 V	-	-				
Rated surge voltage		4 kV	-	-				
Rated current		16 A	-	-				
General information								
Note on contact resistance		approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/ socket						



Connection data																												
Connection points	2	<div>Connection 1</div> <table><tr><td>Connection technology</td><td>Push-in CAGE CLAMP®</td></tr><tr><td>Actuation type</td><td>Operating tool Push-in</td></tr><tr><td>Nominal cross-section</td><td>1.5 mm² / 16 AWG</td></tr><tr><td>Solid conductor</td><td>0.25 ... 1.5 mm² / 22 ... 16 AWG</td></tr><tr><td>Solid conductor; push-in termination</td><td>0.75 ... 1.5 mm² / 20 ... 16 AWG</td></tr><tr><td>Stranded conductor</td><td>0.25 ... 1 mm² / 22 ... 18 AWG</td></tr><tr><td>Fine-stranded conductor</td><td>0.25 ... 1.5 mm² / 22 ... 16 AWG</td></tr><tr><td>Fine-stranded conductor; with insulated ferrule</td><td>0.25 ... 0.75 mm² / 22 ... 20 AWG</td></tr><tr><td>Fine-stranded conductor; with uninsulated ferrule</td><td>0.25 ... 0.75 mm² / 22 ... 20 AWG</td></tr><tr><td>Fine-stranded conductor; with ferrule; push-in termination</td><td>0.75 mm² / 20 AWG</td></tr><tr><td>Strip length</td><td>9 mm / 0.35 inches</td></tr><tr><td>Pole number</td><td>2</td></tr><tr><td>Conductor entry direction to mating direction</td><td>0°</td></tr></table>	Connection technology	Push-in CAGE CLAMP®	Actuation type	Operating tool Push-in	Nominal cross-section	1.5 mm² / 16 AWG	Solid conductor	0.25 ... 1.5 mm² / 22 ... 16 AWG	Solid conductor; push-in termination	0.75 ... 1.5 mm² / 20 ... 16 AWG	Stranded conductor	0.25 ... 1 mm² / 22 ... 18 AWG	Fine-stranded conductor	0.25 ... 1.5 mm² / 22 ... 16 AWG	Fine-stranded conductor; with insulated ferrule	0.25 ... 0.75 mm² / 22 ... 20 AWG	Fine-stranded conductor; with uninsulated ferrule	0.25 ... 0.75 mm² / 22 ... 20 AWG	Fine-stranded conductor; with ferrule; push-in termination	0.75 mm² / 20 AWG	Strip length	9 mm / 0.35 inches	Pole number	2	Conductor entry direction to mating direction	0°
Connection technology	Push-in CAGE CLAMP®																											
Actuation type	Operating tool Push-in																											
Nominal cross-section	1.5 mm² / 16 AWG																											
Solid conductor	0.25 ... 1.5 mm² / 22 ... 16 AWG																											
Solid conductor; push-in termination	0.75 ... 1.5 mm² / 20 ... 16 AWG																											
Stranded conductor	0.25 ... 1 mm² / 22 ... 18 AWG																											
Fine-stranded conductor	0.25 ... 1.5 mm² / 22 ... 16 AWG																											
Fine-stranded conductor; with insulated ferrule	0.25 ... 0.75 mm² / 22 ... 20 AWG																											
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 0.75 mm² / 22 ... 20 AWG																											
Fine-stranded conductor; with ferrule; push-in termination	0.75 mm² / 20 AWG																											
Strip length	9 mm / 0.35 inches																											
Pole number	2																											
Conductor entry direction to mating direction	0°																											
Total number of potentials	2																											
Physical data																												
Pin spacing		4.4 mm / 0.173 inches																										
Width		10.4 mm / 0.409 inches																										
Height		11.7 mm / 0.461 inches																										
Depth		34.1 mm / 1.343 inches																										
Mechanical data																												
Application		General mains applications																										
Coding		A																										
Variable coding		No																										
Marking		N L																										
Potential marking		N L																										
Mating force of a plug-in connection		approx. 20 ... 70 N (depending on pole number)																										
Retention force of a plug-in connection		Locked: > 80 N																										
Unmating force of a plug-in connection		Unlocked: approx. 20 ... 70 N (depending on pole number)																										
Number of mating cycles		200, without resistive load																										
Protection type		IP20; IP40 when mated with strain relief housing																										
Plug-in connection																												
Contact type (pluggable connector)		Male connector/plug																										
Connector (connection type)		for conductor																										
Mismating protection		Yes																										
Note on mismating protection		All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole																										
Locking lever		Can be retrofitted																										
Locking of plug-in connection		Locking lever																										
Note on locking system		All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).																										




Material data		
Note (material data)		Information on material specifications can be found here
Color		black
Cover color		gray
Material group		I
Insulation material		Polyamide (PA66)
Flammability class per UL94		V0
Clamping spring material		Chrome-nickel spring steel (CrNi)
Contact material		Copper or copper alloy; surface-treated
Contact plating		Tin
Fire load		0.08 MJ
Weight		2.5 g

Environmental requirements		
Processing temperature		-5 ... +40 °C
Continuous operating temperature		-35 ... +85 °C
Note on continuous operating temperature		Insulating parts for temperatures ≤ 105 °C

Commercial data		
Product Group		20 (Winsta)
eCl@ss 10.0		27-44-06-05
eCl@ss 9.0		27-44-06-05
ETIM 8.0		EC002560
ETIM 7.0		EC002560
PU (SPU)		50 pcs
Packaging type		Box
Country of origin		PL
GTIN		4055143548489
Customs tariff number		85366990990

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption

Approvals / Certificates														
General approvals		Declarations of conformity and manufacturer's declarations												
<div><div></div><table><tr><th>Approval</th><th>Standard</th><th>Certificate Name</th></tr><tr><td>CCA DEKRA Certification B.V.</td><td>EN 61535</td><td>71-123231</td></tr><tr><td>CCA DEKRA Certification B.V.</td><td>IEC 61535</td><td>NL-85020</td></tr><tr><td>cURus Underwriters Laboratories Inc.</td><td>UL 1977</td><td>E45171</td></tr></table></div>			Approval	Standard	Certificate Name	CCA DEKRA Certification B.V.	EN 61535	71-123231	CCA DEKRA Certification B.V.	IEC 61535	NL-85020	cURus Underwriters Laboratories Inc.	UL 1977	E45171
Approval	Standard	Certificate Name												
CCA DEKRA Certification B.V.	EN 61535	71-123231												
CCA DEKRA Certification B.V.	IEC 61535	NL-85020												
cURus Underwriters Laboratories Inc.	UL 1977	E45171												
		<table><tr><th>Approval</th><th>Standard</th><th>Certificate Name</th></tr><tr><td>EU-Declaration of Confor- mity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr><tr><td>UK-Declaration of Confor- mity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr></table>	Approval	Standard	Certificate Name	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-			
Approval	Standard	Certificate Name												
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-												
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-												



Approvals for marine applications



Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	Steel Vessel Rules	19-HG1869855-PDA
DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001Z6
LR Lloyds Register	EN 61535	08/20047 (E2)



Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 890-212



Documentation

Bid Text			
890-212	19.02.2019	xml 2.96 KB	
890-212	08.06.2015	doc 23.00 KB	



CAD/CAE-Data

CAD data
2D/3D Models 890-212



CAE data
EPLAN Data Portal 890-212
WSCAD Universe 890-212
ZUKEN Portal 890-212



1 Compatible Products

1.1 System counterpart

1.1.1 Cable assembly



[Item No.: 891-8992/105-101](#)
pre-assembled connecting cable; Eca;
Socket/open-ended; 2-pole; Cod. A;
H05VV-F 2 x 1.0 mm²; 1 m; 1,00 mm²;
black

[Item No.: 891-8992/005-101](#)
pre-assembled interconnecting cable;
Eca; Socket/plug; 2-pole; Cod. A; H05VV-
F 2 x 1.0 mm²; 1 m; 1,00 mm²; black



1.1.2 Distribution connector



Item No.: 890-1634
h-distribution connector; 2-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 2 locking levers; black



Item No.: 890-1636
h-distribution connector; 2-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 3 locking levers; for flying leads; black



Item No.: 890-1606
T-distribution connector; 2-pole; Cod. A; 1 input; 2 outputs; 2 locking levers; black



Item No.: 890-1615
T-distribution connector; 2-pole; Cod. A; 1 input; 2 outputs; 3 locking levers; for flying leads; black

1.1.3 Female connector/socket



Item No.: 890-702
Snap-in socket; 2-pole; Cod. A; 1,50 mm²; black



Item No.: 890-802/011-000
Socket for PCBs; angled; 2-pole; Cod. A; black



Item No.: 890-802
Socket for PCBs; straight; 2-pole; Cod. A; black



Item No.: 890-202
Socket; 2-pole; Cod. A; 1,50 mm²; black



Item No.: 890-102
Socket; with strain relief housing; 2-pole; Cod. A; 1,50 mm²; black



Item No.: 890-202/342-000
Socket; with strain relief housing; 2-pole; Cod. A; 1,50 mm²; black

1.2 Required Accessories

1.2.1 Locking system

1.2.1.1 Locking system



Item No.: 890-111
Locking lever; for flying leads; for tool operation; black



Item No.: 890-131
Locking lever; for flying leads; for tool operation; white



Item No.: 890-101
Locking lever; for manual operation; black



Item No.: 890-121
Locking lever; for manual operation; white

1.2.2 Strain relief

1.2.2.1 Strain relief housing



Item No.: 890-502/342-000
Strain relief housing; 2-pole; with locking clip; for 1 cable; 3.8 ... 8.2 mm; 17.5 mm; black



Item No.: 890-512/342-000
Strain relief housing; 2-pole; with locking clip; for 1 cable; 3.8 ... 8.2 mm; 17.5 mm; white



Item No.: 890-502
Strain relief housing; 2-pole; with locking clip; for 1 cable; 3.8 ... 8.2 mm; 30 mm; black



Item No.: 890-512
Strain relief housing; 2-pole; with locking clip; for 1 cable; 3.8 ... 8.2 mm; 30 mm; white

1.3 Optional Accessories

1.3.1 Cover

1.3.1.1 Cover



Item No.: 897-2001
Protective cap; Type1; for sockets and plugs; PVC; red

1.3.2 Installation

1.3.2.1 Mounting accessories



Item No.: 890-310
Mounting carrier; 2- to 5-pole; for flying leads; black



Item No.: 890-311
Mounting carrier; 2- to 5-pole; for flying leads; white

1.3.3 Tool

1.3.3.1 Operating tool




Item No.: 890-382
Operating tool; 2-way; green




Item No.: 210-719
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

Installation Notes


Conductor termination




1. Strip length, outer insulation = 30 mm (2-pole), 37 mm (3-pole), 45 mm (4- and 5-pole)
2. Strip length = 9 mm
3. Extended ground conductor = 8 mm



To terminate fine-stranded conductors, open the clamping unit via screwdriver – 2.5 mm blade width – and insert a stripped conductor until it hits the backstop. Terminate solid conductors by simply pushing them in.




To terminate fine-stranded conductors, open clamping units via operating tool (890-382) and insert stripped conductors until they hit backstop. Terminate solid conductors by simply pushing them in.



To terminate fine-stranded conductors, open clamping units via operating tool (890-383) and insert stripped conductors until they hit backstop. Terminate solid conductors by simply pushing them in.


Installation




Latch the wired connector into the base of the strain relief housing.



Push down strain relief clamp by hand.



Push down strain relief clamp with 2.5 mm screwdriver alternately on both sides.



Latch the top of the strain relief housing.



The printed marking of the connector is clearly visible in the openings of the strain relief housing.