


Color: ■ black

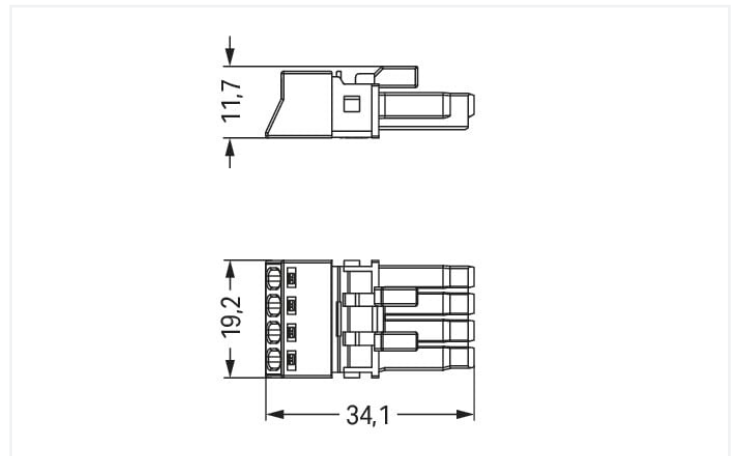

Dimensions in mm

Female connector/socket *WINSTA*® MINI with protection against mismatching

The *WINSTA*® MINI female connector/socket A coding is the pluggable solution for your application in control cabinets, for lighting connections or on PCBs. On PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to establish connections according to various requirements in seconds. The coding options reduce installation errors, allowing fast, secure wiring of all components. General mains applications for almost any domain of use can be realised with *WINSTA*® MINI pluggable installation connectors with A coding. *WINSTA*® MINI is our response to the trend toward miniaturisation. Our smallest pluggable connection system is primarily suited for lights, for example, since as a result of LED technology; due to complex systems, these offer significantly less space for the connection technology.

Lower costs through fast commissioning and elimination of service expenses – solutions from *WINSTA*® MINI

The *WINSTA*® Pluggable Connection System is ideally tailored to the strict requirements of building installation. It makes electrical installation pluggable, and thus faster, even more reliable, and error-free. Use of this pre-assembled system reduces assembly times and installation errors at the construction site. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with protection type IP20 from WAGO.

- protection against mismatching eliminates errors
- compact design for conductors with a cross-section up to 1.5 mm²
- suitable for any application
- exact dimensions
- fast, secure installation



Electrical data				
Ratings per		IEC/EN 60664-1		
Overvoltage category		III	III	II
Pollution degree		3	2	2
Nominal voltage		400 V	-	-
Rated surge voltage		6 kV	-	-
Rated current		16 A	-	-
Approvals per				
Rated voltage		600 V		
Rated current		12 A		
General information				
Note on contact resistance		approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/ socket		
Connection data				
Connection points		4		
Total number of potentials		4		
Connection 1				
Connection technology		Push-in CAGE CLAMP®		
Actuation type		Operating tool Push-in		
Nominal cross-section		1.5 mm² / 16 AWG		
Solid conductor		0.25 ... 1.5 mm² / 22 ... 16 AWG		
Solid conductor; push-in termination		0.75 ... 1.5 mm² / 20 ... 16 AWG		
Stranded conductor		0.25 ... 1 mm² / 22 ... 18 AWG		
Fine-stranded conductor		0.25 ... 1.5 mm² / 22 ... 16 AWG		
Fine-stranded conductor; with insulated ferrule		0.25 ... 0.75 mm² / 22 ... 20 AWG		
Fine-stranded conductor; with uninsulated ferrule		0.25 ... 0.75 mm² / 22 ... 20 AWG		
Fine-stranded conductor; with ferrule; push-in termination		0.75 mm² / 20 AWG		
Strip length		9 mm / 0.35 inches		
Pole number		4		
Conductor entry direction to mating direction		0 °		
Physical data				
Pin spacing		4.4 mm / 0.173 inches		
Width		19.2 mm / 0.756 inches		
Height		11.7 mm / 0.461 inches		
Depth		34.1 mm / 1.343 inches		
Mechanical data				
Application		General mains applications		
Coding		A		
Variable coding		No		
Marking		N 2/L 1/L'		
Potential marking		N 2/L 1/L'		
Mating force of a plug-in connection		approx. 20 ... 70 N (depending on pole number)		
Retention force of a plug-in connection		Locked: > 80 N		
Unmating force of a plug-in connection		Unlocked: approx. 20 ... 70 N (depending on pole number)		
Number of mating cycles		200, without resistive load		
Protection type		IP20; IP40 with strain relief housing		



Plug-in connection	
Contact type (pluggable connector)	Female connector/socket
Connector (connection type)	for conductor
Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Can be retrofitted
Locking of plug-in connection	Locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

Material data	
Note (material data)	Information on material specifications can be found here
Color	black
Cover color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin
Fire load	0.109 MJ
Weight	4.9 g



Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-05
eCl@ss 9.0	27-44-06-05
ETIM 8.0	EC002560
ETIM 7.0	EC002560
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	PL
GTIN	4055143548557
Customs tariff number	85366990990






Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption


Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
 					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61535	71-123231	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	IEC 61535	NL-85020	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
cURus Underwriters Laboratories Inc.	UL 1977	E45171			



Approvals for marine applications

  					
Approval	Standard	Certificate Name			
ABS American Bureau of Ship- ping	Steel Vessel Rules	19-HG1869855-PDA			
DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001Z6			
LR Lloyds Register	EN 61535	08/20047 (E2)			

Downloads

Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 890-204	

Documentation

Bid Text			
890-204	19.02.2019	xml 2.93 KB	
890-204	08.06.2015	doc 23.00 KB	



CAD/CAE-Data	
<div>CAD data</div> <div>2D/3D Models 890-204</div> <div>↓</div>	<div>CAE data</div> <div>WSCAD Universe 890-204</div> <div>↓</div>
	<div>ZUKEN Portal 890-204</div> <div>↓</div>

1 Compatible Products

1.1 System counterpart

1.1.1 Cable assembly



[Item No.: 891-8994/206-101](#)
pre-assembled connecting cable; Eca; Plug/open-ended; 4-pole; Cod. A; H05VV-F 4G 1.5 mm²; 1 m; 1,50 mm²; black



[Item No.: 891-8994/006-101](#)
pre-assembled interconnecting cable; Eca; Socket/plug; 4-pole; Cod. A; H05VV-F 4G 1.5 mm²; 1 m; 1,50 mm²; black

1.1.2 Distribution connector			
Item No.: 890-944 h-distribution connector; 4-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 2 locking levers; black	Item No.: 890-945 h-distribution connector; 4-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 3 locking levers; for flying leads; black	Item No.: 890-626 T-distribution connector; 4-pole; Cod. A; 1 input; 2 outputs; 2 locking levers; black	Item No.: 890-627 T-distribution connector; 4-pole; Cod. A; 1 input; 2 outputs; 3 locking levers; for flying leads; black

1.1.3 Male connector/plug			
Item No.: 890-814/011-000 Plug for PCBs; angled; 4-pole; Cod. A; black	Item No.: 890-814 Plug for PCBs; straight; 4-pole; Cod. A; black	Item No.: 890-214 Plug; 4-pole; Cod. A; 1,50 mm²; black	Item No.: 890-114 Plug; with strain relief housing; 4-pole; 1,50 mm²; black
Item No.: 890-714 Snap-in plug; 4-pole; Cod. A; 1,50 mm²; black			

1.2 Required Accessories			
1.2.1 Locking system			
1.2.1.1 Locking system			
Item No.: 890-111 Locking lever; for flying leads; for tool operation; black	Item No.: 890-131 Locking lever; for flying leads; for tool operation; white	Item No.: 890-101 Locking lever; for manual operation; black	Item No.: 890-121 Locking lever; for manual operation; white



1.2.2 Strain relief

1.2.2.1 Strain relief housing



Item No.: 890-504
Strain relief housing; 4-pole; with locking clip; for 1 cable; 6.5 ... 10.5 mm; 45 mm; black



Item No.: 890-514
Strain relief housing; 4-pole; with locking clip; for 1 cable; 6.5 ... 10.5 mm; 45 mm; white

1.3 Optional Accessories

1.3.1 Cover

1.3.1.1 Cover



Item No.: 897-2003
Protective cap; Type2; for sockets and plugs; PVC; red

1.3.2 Installation

1.3.2.1 Mounting accessories



Item No.: 890-310
Mounting carrier; 2- to 5-pole; for flying leads; black



Item No.: 890-311
Mounting carrier; 2- to 5-pole; for flying leads; white

1.3.3 Shield termination

1.3.3.1 Shield termination



Item No.: 890-524
Shield connecting plate; 4-pole; for sockets

1.3.4 Tool

1.3.4.1 Operating tool







Item No.: 890-384
Operating tool; 4-way; green



Item No.: 210-719
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

Installation Notes

Conductor termination





1. Strip length, outer insulation = 30 mm (2-pole), 37 mm (3-pole), 45 mm (4- and 5-pole)
2. Strip length = 9 mm
3. Extended ground conductor = 8 mm

To terminate fine-stranded conductors, open the clamping unit via screwdriver – 2.5 mm blade width – and insert a stripped conductor until it hits the backstop. Terminate solid conductors by simply pushing them in.

To terminate fine-stranded conductors, open clamping units via operating tool (890-382) and insert stripped conductors until they hit backstop. Terminate solid conductors by simply pushing them in.

To terminate fine-stranded conductors, open clamping units via operating tool (890-383) and insert stripped conductors until they hit backstop. Terminate solid conductors by simply pushing them in.

Installation



Latch the wired connector into the base of the strain relief housing.

Push down strain relief clamp by hand.

Push down strain relief clamp with 2.5 mm screwdriver alternately on both sides.

Latch the top of the strain relief housing.



The printed marking of the connector is clearly visible in the openings of the strain relief housing.

Shield termination



Connector with shield termination

Apply the shield to the sheathed cable.
Strip length, outer insulation = 30 mm
Shield length = 8 mm

Push the shield connecting plate into the connector until fully inserted.

First insert the wired connector into strain relief housing, then snap clamp and cover.