

Data sheet | Item number: 210-112


Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715;

"Hole width 25 mm; silver-colored

<https://www.wago.com/210-112>



Color:  silver-colored

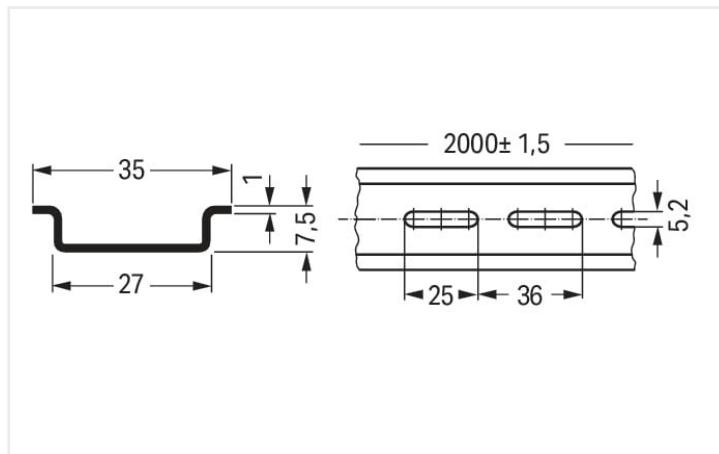

Dimensions in mm

Technical data

Main product function

Mounting accessories

Physical data

Width 2000 mm / 78.74 inches

Height 7.5 mm / 0.295 inches

Depth 35 mm / 1.378 inches

Material Data

Color silver-colored

Fire load 0 MJ

Weight 630 g

Commercial data

Product Group 2 (Terminal Block Accessories)

eCl@ss 10.0 27-40-06-02

eCl@ss 9.0 27-40-06-02

ETIM 8.0 EC001285

ETIM 7.0 EC001285

PU (SPU) 10 (1) pcs

Packaging type Box

Country of origin IT

GTIN 4017332272292

Customs tariff number 72169180000

Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance 210-112			↓

Documentation

Bid Text			
210-112	19.02.2019	xml 2.73 KB	↓
210-112	23.11.2018	docx 14.52 KB	↓

CAD/CAE-Data

CAD data	
2D/3D Models 210-112	↓

CAE data	
EPLAN Data Portal 210-112	↓
WSCAD Universe 210-112	↓
ZUKEN Portal 210-112	↓

1 Compatible products

1.1 Optional accessories

1.1.1 Installation

1.1.1.1 Mounting accessories



Item no.: 210-148
Angled support bracket; without screw; silver-colored



Item no.: 209-109
Edge guards; for DIN 35 rail (7.5 mm high); gray



Item no.: 209-137
Mounting adapter; can be used as end stop; 6.5 mm wide; gray



Item no.: 210-149
Screw M 5 x 8; for angled support bracket



Item no.: 249-117
Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item no.: 249-197
Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item no.: 249-116
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

1.1.2 Marking

1.1.2.1 Label

**Item no.: 210-808**

Labels; for Smart Printer; 9.5 x 25 mm;
white

**Item no.: 210-708**

Labels; for TP printers; 9.5 x 25 mm; white

Installation notes

DIN-Rail	Item No.	Current [A]	Acc. to mm ² /AWG Cu
DIN 35 x 7.5 (steel)			
slotted	210-112	76	16/6
unslotted	210-113	76	16/6
DIN 35 x 15 (steel)			
1.5 mm thick	210-114	125	35/2
2.3 mm thick	210-118	125	35/2
DIN 35 x 7.5 (Al)			
unslotted	210-196	76	16/6
DIN 35 x 15 (Cu)			
2.3 mm thick	210-198	309	150/6/0

Current applies to rails of 1 m/3'3" length

When using standard DIN-rails as ground conductor busbars, please refer to the maximum current capacities listed above. Steel DIN-rails are not suited for PEN (ground and N-conductor) applications per EN 60947-7-2 (VDE 0611, Part 3).