





Color: ■ gray

Similar to illustration

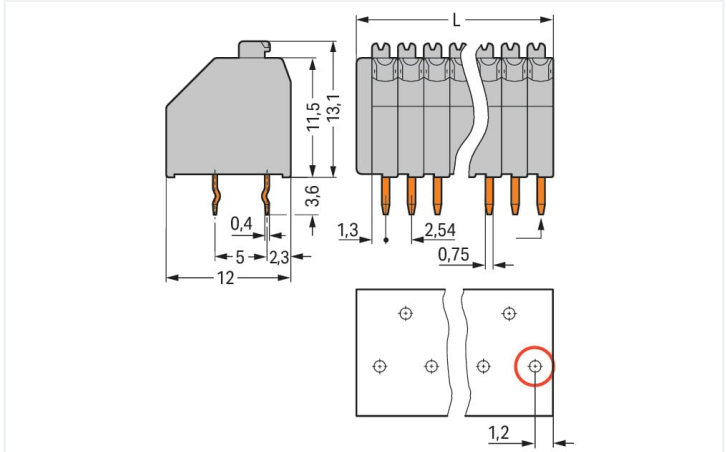

Dimensions in mm
L = (pole no. x pin spacing) + 1.5 mm
First solder pin, front right (red circle)

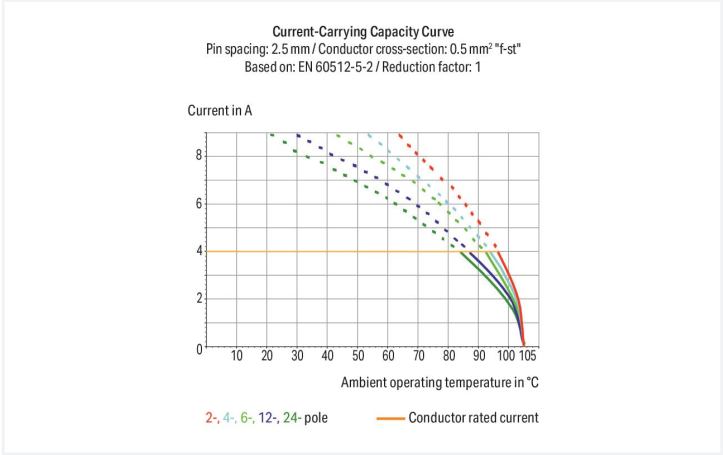

- Compact PCB terminal strips with push-buttons
- Push-in termination of solid conductors
- Termination/removal of fine-stranded conductors via push-buttons
- 45° conductor entry angle provides easy, space-saving wiring
- Custom color combinations
- Terminal strips also available with spacers upon request

Notes	
Variants:	Terminal strips with spacers Direct marking Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ . Other pole numbers Other colors Mixed-color PCB connector strips



Electrical data				
Ratings per		IEC/EN 60664-1		
Overvoltage category	III	III	II	
Pollution degree	3	2	2	
Nominal voltage	160 V	160 V	320 V	
Rated surge voltage	2.5 kV	2.5 kV	2.5 kV	
Rated current	4 A	4 A	4 A	
Approvals per		CSA		
Use group	B	C	D	
Rated voltage	300 V	-	300 V	
Rated current	5 A	-	5 A	

Approvals per				UL 1059	
Use group	B		C	D	
Rated voltage	300 V		-	300 V	
Rated current	5 A		-	5 A	

Connection data					
Connection points	6		Connection 1		
Total number of potentials	6		Connection technology	Push-in CAGE CLAMP®	
Number of connection types	1		Actuation type	Push-button	
Number of levels	1		Solid conductor	0.14 ... 0.5 mm² / 24 ... 20 AWG	
			Fine-stranded conductor	0.2 ... 0.5 mm² / 24 ... 20 AWG	
			Conductor diameter	0.4 ... 0.8 mm / 24 ... 20 AWG	
			Strip length	8.5 ... 9.5 mm / 0.33 ... 0.37 inches	
			Conductor connection direction to PCB	45 °	
			Pole number	6	
Physical data					
Pin spacing			2.54 mm / 0.1 inches		
Width			16.74 mm / 0.659 inches		
Height			16.7 mm / 0.657 inches		
Height from the surface			13.1 mm / 0.516 inches		
Depth			12 mm / 0.472 inches		
Solder pin length			3.6 mm		
Solder pin dimensions			0.4 x 0.75 mm		
Drilled hole diameter with tolerance			1.1 ^(+0.1) mm		
PCB contact					
PCB contact			THT		
Solder pin arrangement			over the entire terminal strip (staggered)		
Number of solder pins per potential			1		
Material data					
Note (material data)			[Information on material specifications can be found here](#)		
Color			gray		
Material group			I		
Insulation material			Polyamide (PA66)		
Flammability class per UL94			V0		
Clamping spring material			Copper alloy		
Contact plating			Tin		
Fire load			0.048 MJ		
Weight			2.3 g		



Environmental requirements	
Limit temperature range	-60 ... +105 °C

Commercial data	
Product Group	4 (Printed Circuit Connectors)
eCl@ss 10.0	27-44-04-01
eCl@ss 9.0	27-44-04-01
ETIM 8.0	EC002643
ETIM 7.0	EC002643
PU (SPU)	280 (70) pcs
Packaging type	Box
Country of origin	CH
GTIN	4044918643245
Customs tariff number	85369010000

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
    					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60998	NTR NL-7705/1	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	EN 60947	NTR NL 7833/2	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CSA DEKRA Certification B.V.	C22.2	1132097			
KEMA/KEUR DEKRA Certification B.V.	EN 60947	2160584.18			
KEMA/KEUR DEKRA Certification B.V.	EN 60998	71-124629			
UL UL International Germany GmbH	UL 1059	E45172			

Approvals for marine applications

 		
Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	-	19-HG1869876-PDA
DNV DNV GL SE	-	TAE000016Z



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 250-1406

↓

Documentation

Additional Information

Technical Section

03.04.2019

pdf
2027.26 KB

↓

CAD/CAE-Data

CAD data

2D/3D Models 250-1406

↓

CAE data

EPLAN Data Portal 250-1406

↓

ZUKEN Portal 250-1406

↓

PCB Design

Symbol and Footprint via SamacSys 250-1406

↓

Symbol and Footprint via Ultra Librarian 250-1406

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



[Item No.: 210-331/254-202](#)
Marking strips; as a DIN A4 sheet; MAR-KED; 1-16 (400x); Height of marker strip: 2.3 mm/0.091 in; Strip length 182 mm; Horizontal marking; Self-adhesive; white



[Item No.: 210-331/254-207](#)
Marking strips; as a DIN A4 sheet; MAR-KED; 1-48 (100x); Height of marker strip: 2.3 mm/0.091 in; Strip length 182 mm; Horizontal marking; Self-adhesive; white



[Item No.: 210-331/254-204](#)
Marking strips; as a DIN A4 sheet; MAR-KED; 17-32 (400x); Height of marker strip: 2.3 mm/0.091 in; Strip length 182 mm; Horizontal marking; Self-adhesive; white



[Item No.: 210-331/254-206](#)
Marking strips; as a DIN A4 sheet; MAR-KED; 33-48 (400x); Height of marker strip: 2.3 mm/0.091 in; Strip length 182 mm; Horizontal marking; Self-adhesive; white

1.1.2 Test and measurement

1.1.2.1 Testing accessories



Item No.: 735-500
WAGO Test pin; 1 mm Ø; 30 V AC / 60 V DC; CAT0; 1 A; 6 mm uninsulated; Test lead for soldering up to 0,5mm²

1.1.3 Tool

1.1.3.1 Operating tool




Item No.: 210-719
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft




Item No.: 210-647
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft; multicoloured

Installation Notes




A groove at the back of the terminal strip differentiates between the two pin spacings.

Conductor termination



Inserting solid conductors via push-in termination.
Inserting fine-stranded conductors via push-buttons, 250 Series – 3.5 mm pin spacing.

Conductor termination



Space-saving wiring, 250 Series – 5 mm pin spacing.

Testing




Testing with 11 mm Ø test pin, on the conductor, 250 Series – 2.5 ... 3.5 mm pin spacing.




Testing with 2 mm Ø test plug, touch contact, 250 Series – 5 mm pin spacing.

Marking



Labeling via self-adhesive strips or direct marking. Mixed-color terminal strips (with or without spacer) are available upon request.



Labeling via self-adhesive strips or direct marking. Mixed-color terminal strips (with or without spacer) are available upon request.