




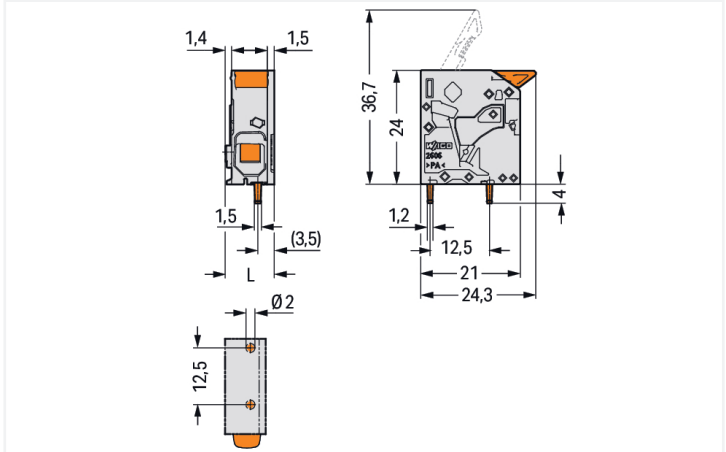

Color: ■ gray

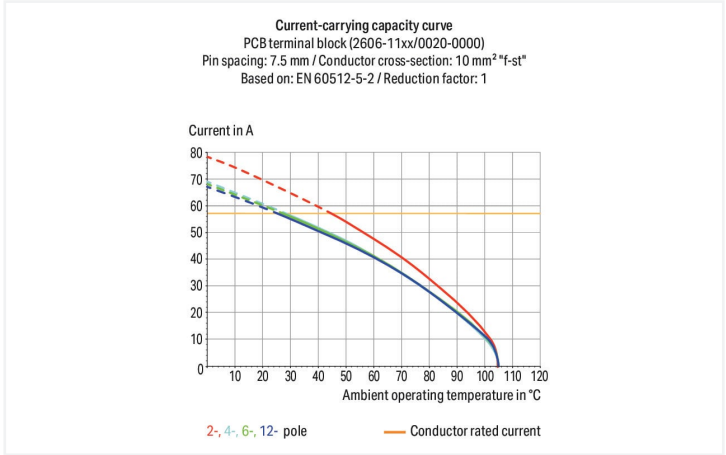

Dimensions in mm
L = 10.35 mm

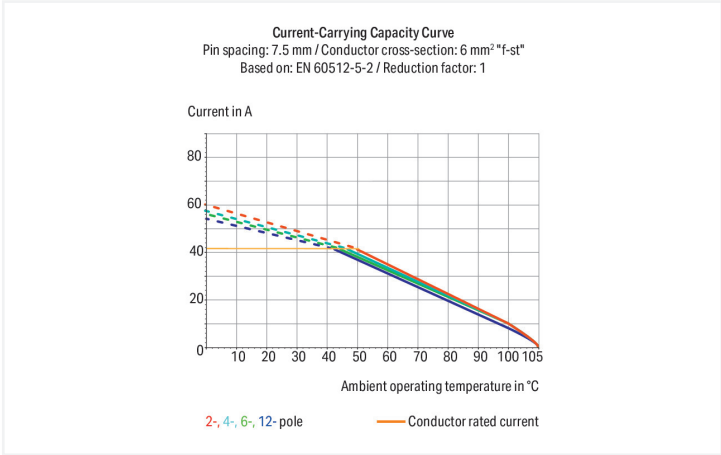

- PCB terminal blocks with Push-in CAGE CLAMP® connection and levers
- Push-in termination of solid and ferruled conductors
- Intuitive and tool-free operation
- Several clamping units can be held open simultaneously, simplifying the connection of multi-core cables
- Testing can be performed both parallel and perpendicular to conductor entry

Notes	
Note	The inherent stability of a single-pole PCB terminal block is less than that of a multi-pole terminal strip. The customer must therefore ensure that these terminal blocks are protected against excessive mechanical stress (e.g., torsional or bending stress), both when connecting the conductor and during subsequent use, for example by providing additional support, shortly holding the connected conductor and appropriate actuation instructions.
Variants:	Other pole numbers Direct marking Other colors Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .



Electrical data						
Ratings per			IEC/EN 60664-1			
Overvoltage category			III	III	II	
Pollution degree			3	2	2	
Nominal voltage			1000 V	1000 V	1000 V	
Rated surge voltage			8 kV	8 kV	8 kV	
Rated current			41 A	41 A	41 A	

Approvals per			UL 1059			
Use group			B	C	D	
Rated voltage			600 V	600 V	-	
Rated current			31 A	31 A	-	

Approvals per			CSA			
Use group			B	C	D	
Rated voltage			600 V	1000 V	-	
Rated current			31 A	31 A	-	

Connection data						
Connection points			1			
Total number of potentials			1			
Number of connection types			1			
Number of levels			1			

Connection 1		
Connection technology	Push-in CAGE CLAMP®	
Actuation type	Lever	
Solid conductor	0.2 ... 10 mm² / 24 ... 8 AWG	
Fine-stranded conductor	0.2 ... 10 mm² / 24 ... 8 AWG	
Fine-stranded conductor; with insulated ferrule	0.25 ... 6 mm²	
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 6 mm²	
Fine-stranded conductor; with twin ferrule	0.25 ... 2.5 mm²	
Strip length	11 ... 13 mm / 0.43 ... 0.51 inches	
Conductor connection direction to PCB	0°	
Pole number	1	

Physical data		
Pin spacing	7.5 mm / 0.295 inches	
Width	10.35 mm / 0.407 inches	
Height	28 mm / 1.102 inches	
Height from the surface	24 mm / 0.945 inches	
Depth	24.3 mm / 0.957 inches	
Solder pin length	4 mm	
Solder pin dimensions	1.5 x 1.2 mm	
Drilled hole diameter with tolerance	2 (+0.1) mm	

PCB contact		
PCB contact	THT	
Solder pin arrangement	over the entire terminal strip (in-line)	
Number of solder pins per potential	2	



Material data		
Note (material data)		Information on material specifications can be found here
Color		gray
Material group		I
Insulation material		Polyamide (PA66)
Flammability class per UL94		V0
Clamping spring material		Chrome-nickel spring steel (CrNi)
Contact material		Electrolytic copper (E _{Cu})
Contact plating		Tin
Fire load		0.101 MJ
Actuator color		orange
Weight		4.5 g

Environmental requirements		
Limit temperature range		-60 ... +105 °C
Processing temperature		-35 ... +60 °C
Continuous operating temperature		-60 ... +105 °C

Commercial data		
eCl@ss 10.0		27-44-04-01
eCl@ss 9.0		27-44-04-01
ETIM 8.0		EC002643
ETIM 7.0		EC002643
PU (SPU)		200 pcs
Packaging type		Box
Country of origin		PL
GTIN		4055143586405
Customs tariff number		85369010000

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 60947-7-4	NL-103311
CSA CSA Group	C22.2	70146882
cURus Underwriters Laboratories Inc.	UL 1059	E45172

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2606-1101

↓

Documentation

Additional Information

Technical Section

03.04.2019

pdf

2027.26 KB

↓

CAD/CAE-Data

CAD data

2D/3D Models 2606-1101

↓

CAE data

ZUKEN Portal 2606-1101

↓

PCB Design

Symbol and Footprint via SamacSys 2606-1101

↓

Symbol and Footprint via Ultra Librarian 2606-1101


↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule


1.1.1.1 Ferrule




[Item No.: 216-263](#)
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



[Item No.: 216-264](#)
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



[Item No.: 216-266](#)
Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



[Item No.: 216-267](#)
Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



[Item No.: 216-208](#)
Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow



[Item No.: 216-108](#)
Ferrule; Sleeve for 6 mm² / AWG 10; uninsulated; electro-tin plated; silver-colored

Installation Notes

Conductor termination



Insert fine-stranded conductors – and remove all conductors – via operating tool.

Conductor termination



Insert solid conductors via push-in termination.