Data Sheet | Item Number: 2626-3101


PCB terminal block; 6 mm²; Pin spacing 7.5 mm; 1-pole; Push-in CAGE CLAMP®;

6,00 mm²; gray


https://www.wago.com/2626-3101






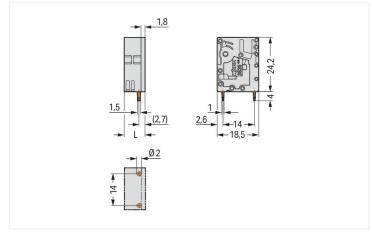

Color: ■ gray

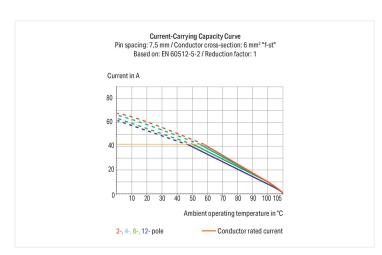

Dimensions in mm L = 9.3 mm

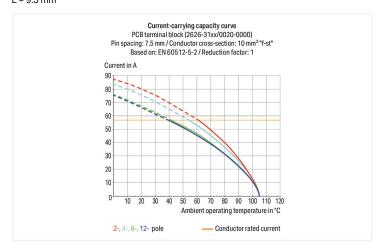

- PCB terminal strips with Push-in CAGE CLAMP® connection
- · Push-in termination of solid and ferruled conductors
- Ideal for panel feedthrough applications via operation parallel to conductor entry
- Testing can be performed both parallel and perpendicular to conductor entry

| Notes | |
|-------|--|
| Note | The inherent stability of a single-pole PCB terminal block is less than that of a multi-pole |
| | terminal strip. The customer must therefore ensure that these terminal blocks are pro- |
| | tected against excessive mechanical stress (e.g., torsional or bending stress), both when |
| | connecting the conductor and during subsequent use, for example by providing additio- |
| | nal support, shortly holding the connected conductor and appropriate actuation in- |

structions.

Variants: Other pole numbers
Direct marking
Other colors

Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/.



| Electrical data | | | |
|----------------------|--------|------------|--------|
| Ratings per | IE | C/EN 60664 | -1 |
| Overvoltage category | III | III | II |
| Pollution degree | 3 | 2 | 2 |
| Nominal voltage | 1000 V | 1000 V | 1000 V |
| Rated surge voltage | 8 kV | 8 kV | 8 kV |
| Rated current | 48 A | 48 A | 48 A |

| Approvals per | | UL 1059 | |
|---------------|-------|---------|---|
| Use group | В | С | D |
| Rated voltage | 600 V | 600 V | - |
| Rated current | 38 A | 38 A | - |
| | | | |

| Approvals per | | CSA | |
|---------------|-------|--------|---|
| Use group | В | С | D |
| Rated voltage | 600 V | 1000 V | - |
| Rated current | 38 A | 38 A | - |

| ata ts | 1 |
|------------------------|---|
| of potentials | 1 |
| er of connection types | 1 |
| r of levels | 1 |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

| Physical data | |
|--------------------------------------|------------------------|
| Pin spacing | 7.5 mm / 0.295 inches |
| Width | 9.3 mm / 0.366 inches |
| Height | 28.2 mm / 1.11 inches |
| Height from the surface | 24.2 mm / 0.953 inches |
| Depth | 18.5 mm / 0.728 inches |
| Solder pin length | 4 mm |
| Solder pin dimensions | 1.5 x 1 mm |
| Drilled hole diameter with tolerance | 2 ^(+0.1) mm |

| Mechanical data | |
|-----------------|-----------------------|
| Mounting type | Feed-through mounting |

Data Sheet | Item Number: 2626-3101 https://www.wago.com/2626-3101



| PCB contact | |
|-------------------------------------|--|
| PCB contact | THT |
| Solder pin arrangement | over the entire terminal strip (in-line) |
| Number of solder pins per potential | 2 |

| Material data | |
|-----------------------------|--|
| Note (material data) | la farmation and make in large of the bisses and have found have |
| | Information on material specifications can be found here |
| Color | gray |
| Material group | |
| Insulation material | Polyamide (PA66) |
| Flammability class per UL94 | VO |
| Clamping spring material | Chrome-nickel spring steel (CrNi) |
| Contact material | Electrolytic copper (E _{Cu}) |
| Contact plating | Tin |
| Fire load | 0 MJ |
| Weight | 4.5 g |

| Environmental requirements | |
|----------------------------------|-------------|
| Limit temperature range | -60 +105 ℃ |
| Processing temperature | -35+60°C |
| Continuous operating temperature | -60 +105 °C |

| Commercial data | |
|-----------------------|---------------|
| eCl@ss 10.0 | 27-44-04-01 |
| eCl@ss 9.0 | 27-44-04-01 |
| ETIM 8.0 | EC002643 |
| ETIM 7.0 | EC002643 |
| PU (SPU) | 200 pcs |
| Packaging type | Box |
| Country of origin | DE |
| GTIN | 4055143587266 |
| Customs tariff number | 85369010000 |

| Environmental Product Compliance | |
|----------------------------------|------------------------|
| RoHS Compliance Status | Compliant,No Exemption |

Approvals / Certificates

General approvals









| Approval | Standard | Certificate Name |
|---|---------------|------------------|
| CB DEKRA Certification B.V. | IEC 60947-7-4 | NL-103311 |
| CSA CSA Group | C22.2 | 70146882 |
| KEMA/KEUR DEKRA Certification B.V. | EN 60947-7-4 | 71-113203 |
| UL Underwriters Laboratories Inc. | C22.2 No. 158 | E45172 |

General approvals

UL Underwriters Laboratories UL 1059


E45172


Data Sheet | Item Number: 2626-3101


https://www.wago.com/2626-3101


via Ultra Librarian 2626-3101



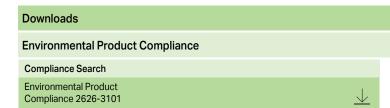



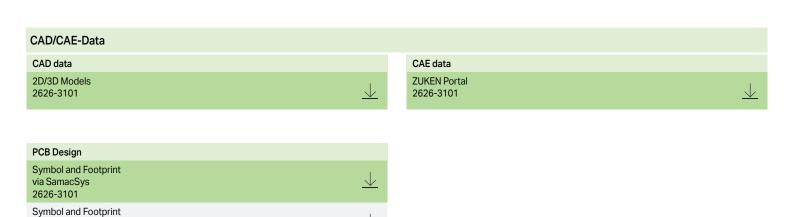

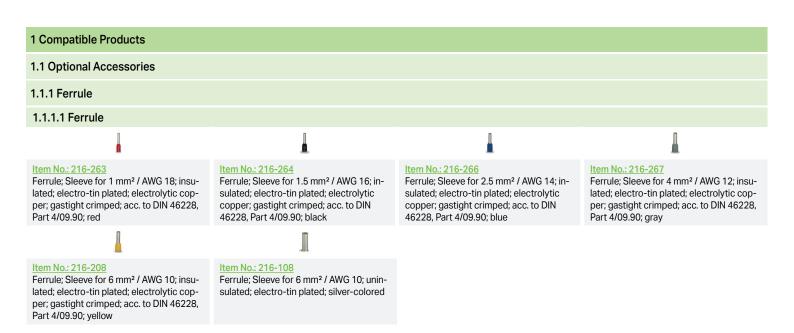

Data Sheet | Item Number: 2626-3101

https://www.wago.com/2626-3101



1.1.2 Tool

1.1.2.1 Operating tool



Item No.: 210-721

Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination



Insert fine-stranded conductors and remove all conductor types via operating tool.

Conductor termination



Insert solid conductors via push-in termi-

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at:: $\underline{www.wago.com}$

Page 5/5 Version 19.04.2024