




Color: ■ black

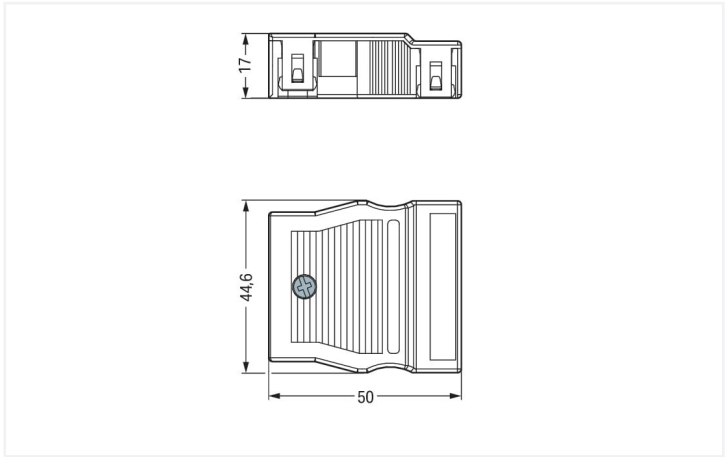

Dimensions in mm

Strain relief housing WINSTA® MIDI 4-pole

The strain relief housing from the WINSTA® MIDI product line guarantees you the greatest possible flexibility in electrical installation. An extensive range of accessories rounds out the WINSTA® product line from WAGO. The WINSTA® MIDI product line achieves maximum flexibility for the installation. With its Push-in CAGE CLAMP® spring pressure connection technology, it ensures error-free, time-saving installation and offers customization for meeting all installation requirements. A range up to 55 mm can be used for the strip length.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismatching from WAGO.

- for automation controllers
- convenient installation and commissioning

Connection data	
Connection 1	
Pole number	4
Connectable sheathed cable diameter	9 ... 13 mm
Strip length (outer insulation)	55 mm

Physical data	
Pin spacing	10 mm / 0.394 inches
Width	44.6 mm / 1.756 inches
Height	17 mm / 0.669 inches
Depth	50 mm / 1.969 inches






Material data		
Note (material data)		Information on material specifications can be found here
Color	black	
Material group	I	
Insulation material	Polyamide (PA66)	
Flammability class per UL94	V0	
Fire load	0.361 MJ	
Weight	11.8 g	

Environmental requirements		
Processing temperature	-5 ... +40 °C	
Continuous operating temperature	-35 ... +85 °C	
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C	

Commercial data		
Product Group	20 (Winsta)	
eCl@ss 10.0	27-44-06-92	
eCl@ss 9.0	27-44-06-92	
ETIM 8.0	EC002863	
ETIM 7.0	EC002863	
PU (SPU)	25 pcs	
Packaging type	Box	
Country of origin	DE	
GTIN	4017332755313	
Customs tariff number	39269097900	

Environmental Product Compliance		
RoHS Compliance Status	Compliant, No Exemption	

Approvals / Certificates

General approvals			Approvals for marine applications		
			 		
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171	DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001Z6
cURus Underwriters Laboratories Inc.	UL 1059	E 45172	LR Lloyds Register	IEC 61984	LR22429487TA



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-504

↓

Documentation				
Bid Text				
770-504	19.02.2019	xml	2.73 KB	↓
770-504	12.03.2015	doc	23.50 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models 770-504

↓

CAE data

EPLAN Data Portal 770-504

↓

WSCAD Universe 770-504

↓

ZUKEN Portal 770-504

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 210-333

Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white