




Color: ■ black

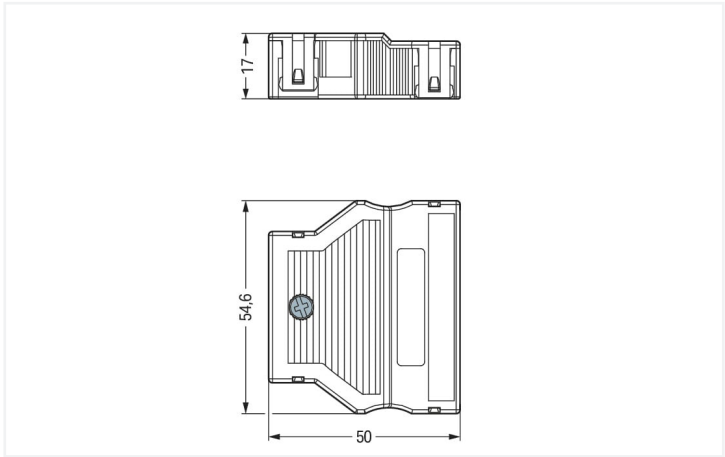

Dimensions in mm

Strain relief housing WINSTA® MIDI 5-pole

The strain relief housing from the WINSTA® MIDI product line guarantees you the greatest possible flexibility in electrical installation. With WAGO, you can enjoy the advantages of a large selection of expansions for the WINSTA® product line. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is used in a broad range of individual products you can use for quick, easy, flexible, and secure installation. The strip length is 55 mm.

WINSTA® MIDI solutions for your electrical installation – protected against mismatching and maintenance-free

WINSTA® is the pluggable connection system that is perfectly tailored to the strict requirements of electrical installation. It allows error-free installation of cables and components, quickly and reliably. Now you can also lower installation expenses without compromising quality and safety: with protection against mismatching eliminates the need for servicing and prevents unnecessary downtime.

- simple circuits
- quick replacement of defective units during ongoing operation

Connection data		
Connection 1		
Pole number	5	
Connectable sheathed cable diameter	9 ... 13 mm	
Strip length (outer insulation)	55 mm	

Physical data		
Pin spacing	10 mm / 0.394 inches	
Width	54.6 mm / 2.15 inches	
Height	17 mm / 0.669 inches	
Depth	50 mm / 1.969 inches	







Material data	
Note (material data)	Information on material specifications can be found here
Color	black
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.376 MJ
Weight	13 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332701679
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Approvals for marine applications		
 			 		
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6
cURus Underwriters Laboratories Inc.	UL 1059	E 45172	LR Lloyds Register	IEC 61984	LR22429487TA
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61535	40029808			



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-505

↓

Documentation

Bid Text

770-505	19.02.2019	xml 2.73 KB	↓
770-505	12.03.2015	doc 23.50 KB	↓

ausschreiben.de
770-505

↓

CAD/CAE-Data

CAD data

2D/3D Models 770-505

↓

CAE data

EPLAN Data Portal
770-505

↓

WSCAD Universe
770-505

↓

ZUKEN Portal 770-505

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 210-333
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white