
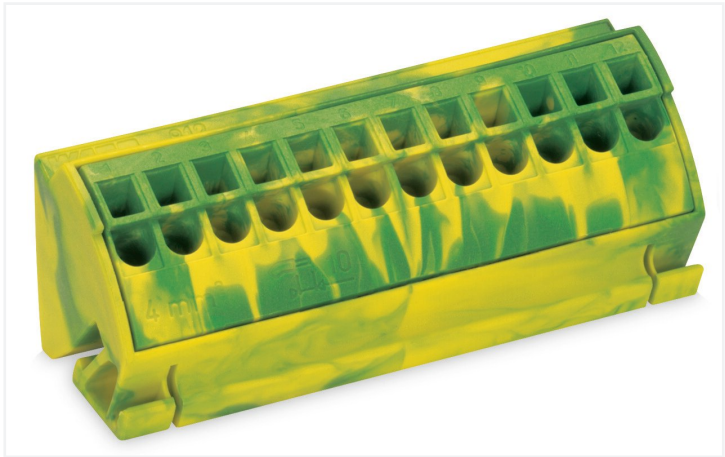


Data Sheet | Item Number: 812-100
Ground busbar terminal block; for (10 x 3) mm busbars; Push-in CAGE CLAMP®;
4,00 mm²; green-yellow
<https://www.wago.com/812-100>

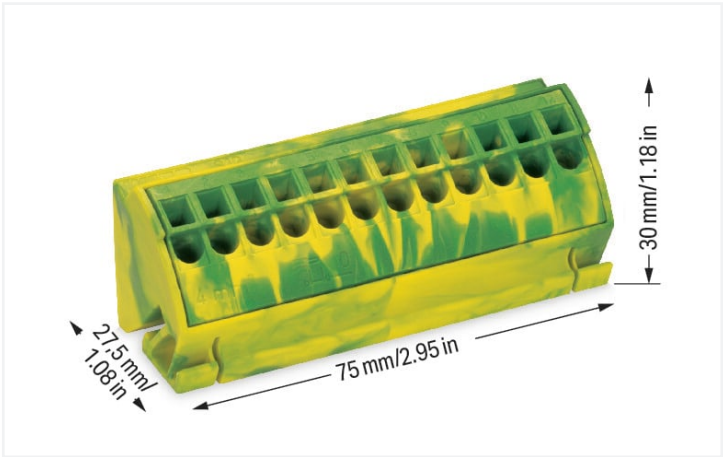

Color: ■ green-yellow

Connection data			
Connection points	12	Connection 1	
Total number of potentials	1	Connection technology	Push-in CAGE CLAMP®
Number of levels	1	Actuation type	Operating tool
		Connectable conductor materials	Copper
		Solid conductor	0.5 ... 4 mm² / 20 ... 12 AWG
		Solid conductor; push-in termination	0.5 ... 4 mm² / 20 ... 12 AWG
		Stranded conductor	0.5 ... 4 mm² / 20 ... 12 AWG
		Fine-stranded conductor	0.5 ... 4 mm² / 20 ... 12 AWG
		Strip length	11 mm / 0.43 inches
		Wiring direction	Front-entry wiring

Physical data	
Width	75 mm / 2.953 inches
Height	30 mm / 1.181 inches
Depth	27.5 mm / 1.083 inches


Material data	
Note (material data)	Information on material specifications can be found here
Color	green-yellow
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.822 MJ
Weight	35.6 g



Environmental requirements	
Continuous operating temperature	-35 ... +85 °C

Commercial data	
Product Group	12 (Matrix Patch Board)
eCl@ss 10.0	27-14-11-46
eCl@ss 9.0	27-14-11-46
ETIM 8.0	EC000001
ETIM 7.0	EC000001
PU (SPU)	10 pcs
Packaging type	Box
Country of origin	PL
GTIN	4044918253253
Customs tariff number	85369010000

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
		
Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60947	2160584.49
CCA DEKRA Certification B.V.	EN 60947	NTR NL-7153
CSA DEKRA Certification B.V.	C22.2 No. 158	2131504
UR Underwriters Laboratories Inc.	UL 1059	E45172
		EU-Declaration of Confor- mity WAGO GmbH & Co. KG
		UK-Declaration of Confor- mity WAGO GmbH & Co. KG

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 812-100	



Documentation

Bid Text			
812-100	18.07.2019	xml 3.34 KB	
812-100	18.07.2019	docx 14.76 KB	

CAD/CAE-Data

CAD data	CAE data
2D/3D Models 812-100	EPLAN Data Portal 812-100
	WSCAD Universe 812-100
	ZUKEN Portal 812-100

1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule

1.1.1.1 Ferrule

 Item No.: 216-301 Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow	 Item No.: 216-321 Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow	 Item No.: 216-151 Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated	 Item No.: 216-131 Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated; silver-colored
 Item No.: 216-302 Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise	 Item No.: 216-322 Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise	 Item No.: 216-132 Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated	 Item No.: 216-152 Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated
 Item No.: 216-201 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white	 Item No.: 216-221 Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white	 Item No.: 216-101 Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated; silver-colored	 Item No.: 216-121 Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated; silver-colored
 Item No.: 216-202 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray	 Item No.: 216-222 Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray	 Item No.: 216-102 Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated; silver-colored	 Item No.: 216-122 Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated; silver-colored
 Item No.: 216-203 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red	 Item No.: 216-223 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red	 Item No.: 216-103 Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated	 Item No.: 216-123 Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; silver-colored
 Item No.: 216-204 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black	 Item No.: 216-224 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black	 Item No.: 216-124 Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated	 Item No.: 216-104 Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated; silver-colored

1.1.1.1 Ferrule



Item No.: 216-110
Ferrule; Sleeve for 16 mm² / AWG 6; unin-
sulated; electro-tin plated; brown metallic



Item No.: 216-205
Ferrule; Sleeve for 2.08 mm² / AWG 14; in-
sulated; electro-tin plated; yellow



Item No.: 216-206
Ferrule; Sleeve for 2.5 mm² / AWG 14; in-
sulated; electro-tin plated; blue



Item No.: 216-106
Ferrule; Sleeve for 2.5 mm² / AWG 14; un-
insulated; electro-tin plated; silver-colo-
red



Item No.: 216-207
Ferrule; Sleeve for 4 mm² / AWG 12; insu-
lated; electro-tin plated; gray



Item No.: 216-107
Ferrule; Sleeve for 4 mm² / AWG 12; unin-
sulated; electro-tin plated

1.1.2 N-busbar


1.1.2.1 Mounting accessories



Item No.: 210-133
Busbar; tin-plated; 1000 mm long; Cu 10
mm x 3 mm; white


Installation Notes

Installation




Unlock right and left positions to remove
the ground busbar terminal block. Then
pull up the block from the busbar.

Conductor termination



Conductor termination (4 mm²/12 AWG):
With Push-in CAGE CLAMP®, solid con-
ductors can be terminated by simply pu-
shing them into the 12 x 4 mm² busbar
terminal block, significantly reducing wir-
ing time.



Conductor removal (4 mm²/12 AWG and
16 mm²/6 AWG):
Open the clamping unit using an opera-
ting tool.