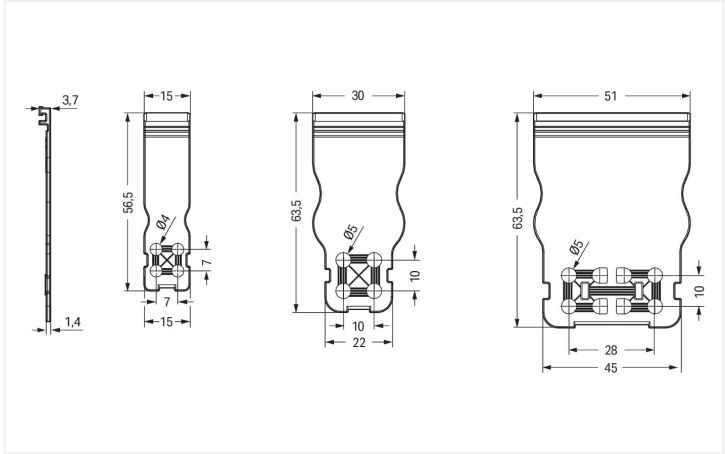




Color: ■ light gray



Dimensions in mm
The arrangement of the attachments for cable ties allows single conductors or multi-core cables to be secured in different ways. The width of the cable ties must correspond to the hole dimensions of the strain relief plates shown above.

Physical data	
Width	51 mm / 2.01 inches
Height	3.7 mm / 0.146 inches
Depth	68.5 mm / 2.697 inches

Mechanical data	
Suitable	for standard male and female connectors

Material data	
Note (material data)	Information on material specifications can be found here
Color	light gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0 MJ
Weight	5.1 g


Commercial data	
eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-11-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	48 (24) pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143463508
Customs tariff number	85389099990


Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 831-506	↓

Documentation			
Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	↓

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 831-506	ZUKEN Portal 831-506
↓	↓

Installation Notes	
Installation	
	
Strain relief plate, for field assembly	

Application	
	
Strain relief plate, for factory assembly 1-conductor female conductor, 4-pole, 7.62 mm pin spacing, light gray (831-3104/135-000)	