

Data Sheet | Item Number: 862-8533


4-conductor chassis-mount terminal strip; with ground contact; N-PE-L1; 3-pole; 1 snap-in foot per pole; 4 mm<sup>2</sup>; 4,00 mm<sup>2</sup>; black

<https://www.wago.com/862-8533>




Color: ■ black

Similar to illustration

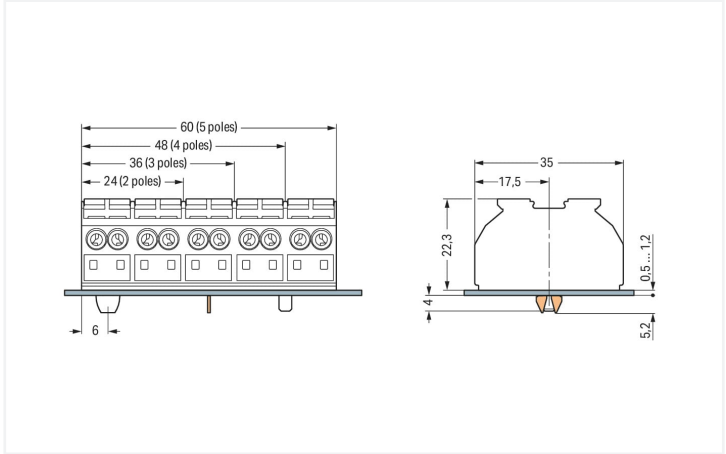

Dimensions in mm  
Dimensions in mm  
for chassis-mount terminal strips

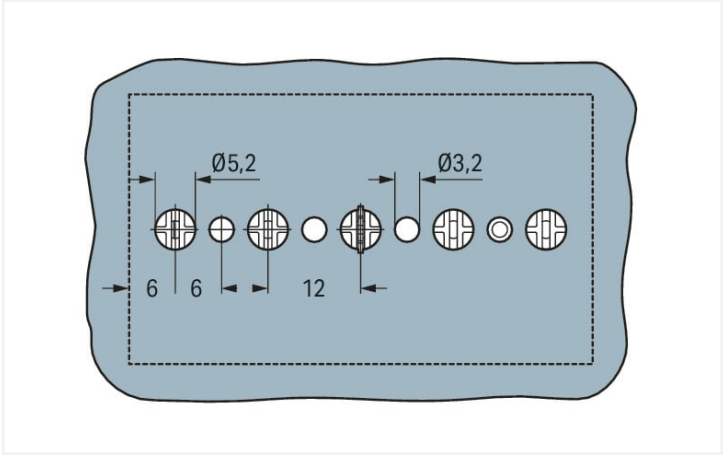

Dimensions in mm  
for PE contact and snap-in mounting foot (Ø 5.2 mm)

Electrical data

Ratings per IEC/EN	
Nominal voltage (III/3)	500 V
Rated impulse voltage (III/3)	6 kV
Rated current	32 A
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3





Connection data			
Connection points	12	<b>Connection 1</b>	
Total number of potentials	3		
PE function	with ground contact		
		Connection technology	Push-in CAGE CLAMP®
		Actuation type	Push-button
		Connectable conductor materials	Copper
		Solid conductor	0.5 ... 4 mm² / 20 ... 12 AWG
		Solid conductor; push-in termination	0.75 ... 4 mm² / 18 ... 12 AWG
		Stranded conductor	0.5 ... 4 mm² / 20 ... 12 AWG
		Fine-stranded conductor	0.5 ... 4 mm² / 20 ... 12 AWG
		Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm² / 20 ... 16 AWG
		Fine-stranded conductor; with ferrule; push-in termination	0.75 mm² / 18 AWG
		Note (conductor cross-section)	Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination.
		Strip length	10 ... 11 mm / 0.39 ... 0.43 inches
		Pole number	3
		Wiring direction	Side-entry wiring
Physical data			
Pin spacing		12 mm / 0.472 inches	
Width		36 mm / 1.417 inches	
Height from the surface		22.3 mm / 0.878 inches	
Depth		35 mm / 1.378 inches	
Mechanical data			
Marking		N- -L1	
Mounting type		Snap-in foot	
Material data			
Note (material data)		<a href="#">Information on material specifications can be found here</a>	
Color		black	
Material group		I	
Insulation material		Polyamide (PA66)	
Flammability class per UL94		V0	
Fire load		0.44 MJ	
Halogen-free		Yes	
Weight		21.3 g	
Commercial data			
eCl@ss 10.0		27-14-11-06	
eCl@ss 9.0		27-14-11-06	
ETIM 8.0		EC001284	
ETIM 7.0		EC001284	
PU (SPU)		250 pcs	
Packaging type		Bag	
Country of origin		DE	
GTIN		4044918510417	
Customs tariff number		85369010000	





Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
			Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60947	NTR NL 6912	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	EN 60947	2146425.01	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CSA DEKRA Certification B.V.	C22.2 No. 158	1505030			
ENEC 15 UL International Germany GmbH	EN 60998	143856-01			
UL UL International Germany GmbH	UL 1059	E45172			

Approvals for marine applications

Approval	Standard	Certificate Name
DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001V2
LR Lloyds Register	EN 60947	91/20112 (E9)

Downloads

Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 862-8533	

Documentation

Bid Text			
862-8533	19.02.2019	xml 3.61 KB	
862-8533	12.06.2017	doc 24.50 KB	













CAD/CAE-Data	
<div>CAD data</div> <div>2D/3D Models 862-8533</div> <div>↓</div>	<div>CAE data</div> <div>EPLAN Data Portal 862-8533</div> <div>↓</div>
	<div>WSCAD Universe 862-8533</div> <div>↓</div>
	<div>ZUKEN Portal 862-8533</div> <div>↓</div>

1 Compatible Products

1.1 Optional Accessories


1.1.1 Ferrule

1.1.1.1 Ferrule

 <div><a href="#">Item No.: 216-241</a> Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white</div>	 <div><a href="#">Item No.: 216-141</a> Ferrule; Sleeve for 0.5 mm² / 20 AWG; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92</div>	 <div><a href="#">Item No.: 216-242</a> Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray</div>	 <div><a href="#">Item No.: 216-142</a> Ferrule; Sleeve for 0.75 mm² / 18 AWG; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92</div>
 <div><a href="#">Item No.: 216-243</a> Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red</div>	 <div><a href="#">Item No.: 216-143</a> Ferrule; Sleeve for 1 mm² / AWG 18; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92</div>	 <div><a href="#">Item No.: 216-244</a> Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black</div>	 <div><a href="#">Item No.: 216-144</a> Ferrule; Sleeve for 1.5 mm² / AWG 16; un-insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92; silver-colored</div>

1.1.2 Jumper


1.1.2.1 Jumper




[Item No.: 862-482](#)  
Jumper; for conductor entry; insulated; black

1.1.3 Marking

1.1.3.1 Marking strip



[Item No.: 709-177](#)  
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



[Item No.: 709-178](#)  
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white



## 1.1.4 Test and measurement

### 1.1.4.1 Testing accessories



**Item No.: 210-136**

Test plug; 2 mm Ø; with 500 mm cable; red

## 1.1.5 Tool


### 1.1.5.1 Operating tool



**Item No.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

## Installation Notes





**Cost-effective features:**

WAGO's 862 Series Chassis-Mount Terminal Strips were developed specifically to minimize wiring costs, while accommodating requirements for flexible mounting, multiple connection points and easy usage:

- Equipped with Push-in CAGE CLAMP®, the 862 Series connects up to four conductors sized 0.5 to 4 mm² (20 ... 12 AWG). Due to multiple connection points per pole, different conductor sizes can be used within the same terminal block position.
- For factory wiring, Push-in CAGE CLAMP® Connection Technology allows solid conductors, fine-stranded conductors with ferrules or ultrasonically bonded conductors from 0.5 ... 4 mm² (20 ... 12 AWG) to be terminated by simply pushing them into unit (length of bonded conductor end: min. 10 mm).
- Convenient automatic grounding contact (optional)
- Snap-in mounting feet for fast assembly
- Push-buttons for easy installation with an operating tool or by hand
- Built-in test points simplify testing with 2 mm Ø test plug
- Standard marking for each pole, or custom marking for large orders



Conductor termination



Terminating four conductors per pole – solid and fine-stranded.


Inserting a conductor via push-button.

Commoning




Commoning using a comb-style jumper bar (862-482).

Testing




Testing with a 2 mm Ø test plug (max. 42 V).



Dimensions in mm

Marking



Marking by direct, one-side printing and marking strips