


Data Sheet | Item Number: 890-115

Plug; with strain relief housing; 5-pole; 1,50 mm²; black


<https://www.wago.com/890-115>



Color: ■ black

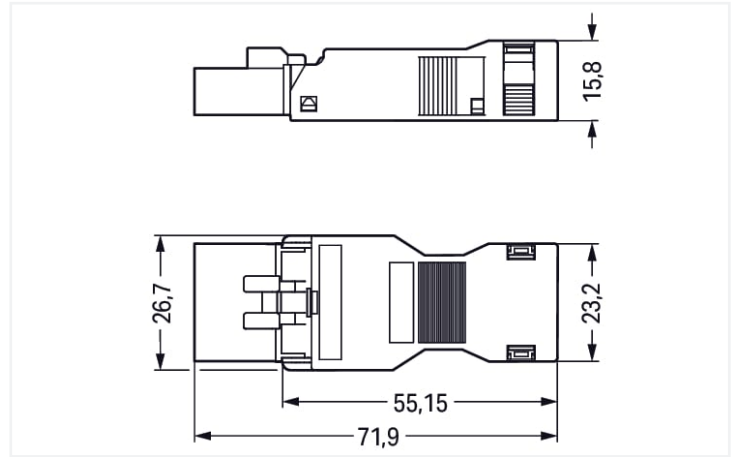

Dimensions in mm

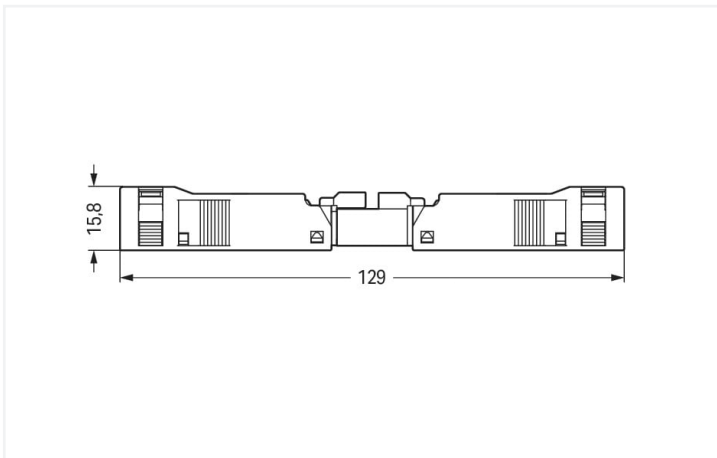

Dimensions in mm

Overall length when mated

Male connector/plug WINSTA® MINI 5-pole

For signal and power transmission: The WINSTA® MINI male connector/plug with protection against mismatching. WAGO pluggable installation connectors are useful when criteria repeat or are planned on a specified grid, for example for installing grid lighting or flush-mount lighting. For greater security in electrical installations, the pluggable installation connector is provided with mechanical protection against mismatching. The pluggable installation connector is protected against ingress by solid granular objects with a diameter below 1 mm in accordance with protection type IP40. Standard mains applications for almost any domain of use can be implemented with WINSTA® MINI pluggable installation connectors with A coding. WINSTA® MINI follows the trend towards miniaturisation. Our smallest pluggable connection system is especially suitable for lights, for instance, since as a result of LED technology; due to complex systems, these offer less and less space for the connection technology. The strip length is 45 mm.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Choose durability and quality – with strain relief hosting from WAGO makes the installation of electrical components visibly easier.

- protection against mismatching eliminates errors
- easy tool-free operation, a wide range of coding options
- with A coding for use in a large number of general mains applications
- exact dimensions
- convenient installation and commissioning



This item includes:



Item No.: 890-215	1	Item No.: 890-505	1
Plug; 5-pole; Cod. A; 1,50 mm ² ; black		Strain relief housing; 5-pole; with locking clip; for 1 cable; 6.5 ... 10.5 mm; 45 mm; black	

Electrical data

Ratings per				IEC/EN 60664-1		Approvals per		UL 1977	
Overvoltage category	III	III	II			Rated voltage		600 V	
Pollution degree	3	2	2			Rated current		12 A	
Nominal voltage	400 V	-	-						
Rated surge voltage	6 kV	-	-						
Rated current	13 A	-	-						

General information	
Note on contact resistance	approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/ socket

Connection data

Connection points	5	Connection 1	
Total number of potentials	5	Connection technology	Push-in CAGE CLAMP®
		Actuation type	Operating tool Push-in
		Nominal cross-section	1.5 mm ² / 16 AWG
		Solid conductor	0.25 ... 1.5 mm ² / 22 ... 16 AWG
		Solid conductor; push-in termination	0.75 ... 1.5 mm ² / 20 ... 16 AWG
		Stranded conductor	0.25 ... 1 mm ² / 22 ... 18 AWG
		Fine-stranded conductor	0.25 ... 1.5 mm ² / 22 ... 16 AWG
		Fine-stranded conductor; with insulated ferrule	0.25 ... 0.75 mm ² / 22 ... 20 AWG
		Fine-stranded conductor; with uninsulated ferrule	0.25 ... 0.75 mm ² / 22 ... 20 AWG
		Fine-stranded conductor; with ferrule; push-in termination	0.75 mm ² / 20 AWG
		Strip length	9 mm / 0.35 inches
		Pole number	5
		Connectable sheathed cable diameter	6.5 ... 10.5 mm
		Conductor entry direction to mating direction	0°
		Strip length (outer insulation)	45 mm

Physical data

Pin spacing	4.4 mm / 0.173 inches
Width	26.7 mm / 1.051 inches
Height	15.8 mm / 0.622 inches
Depth	71.9 mm / 2.831 inches

Mechanical data

Application	General mains applications
Coding	A
Variable coding	No
Marking	3 2 1 N
Potential marking	3 2 1 N
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection	Locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Protection type	IP40

Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for conductor
Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Can be retrofitted
Locking of plug-in connection	Locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).
Strain relief	Strain relief housing

Material data

Note (material data)	Information on material specifications can be found here
Color	black
Cover color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin
Fire load	0.403 MJ
Connector color	black
Strain relief color	black
Weight	11.6 g





Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C




Commercial data	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-05
eCl@ss 9.0	27-44-06-05
ETIM 8.0	EC002560
ETIM 7.0	EC002560
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454232924
Customs tariff number	85366990990

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
 			Approval	Standard	Certificate Name
Approval	Standard	Certificate Name	EU-Declaration of Confor-	-	-
CCA	EN 61535	71-123231	mity		
DEKRA Certification B.V.			WAGO GmbH & Co. KG		
CCA	IEC 61535	NL-85020	UK-Declaration of Confor-	-	-
DEKRA Certification B.V.			mity		
cURus	UL 1977	E45171	WAGO GmbH & Co. KG		
Underwriters Laboratories Inc.					

Approvals for marine applications

  		
Approval	Standard	Certificate Name
ABS	Steel Vessel Rules	19-HG1869855-PDA
American Bureau of Ship-		
ping		
DNV GL	-	TAE00001Z6
Det Norske Veritas, Ger-		
manischer Lloyd		
LR	EN 61535	08/20047 (E2)
Lloyds Register		



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance 890-115			

Documentation

Bid Text			
890-115	19.02.2019	xml 3.01 KB	
890-115	08.06.2015	doc 23.50 KB	

CAD/CAE-Data

CAD data			
2D/3D Models 890-115			

CAE data			
WSCAD Universe 890-115			
ZUKEN Portal 890-115			

1 Compatible Products

1.1 System counterpart

1.1.1 Cable assembly



[Item No.: 891-8995/106-101](#)
pre-assembled connecting cable; Eca; Socket/open-ended; 5-pole; Cod. A; H05VV-F 5G 1.5 mm²; 1 m; 1,50 mm²; black



[Item No.: 891-8995/006-101](#)
pre-assembled interconnecting cable; Eca; Socket/plug; 5-pole; Cod. A; H05VV-F 5G 1.5 mm²; 1 m; 1,50 mm²; black

1.1.2 Distribution connector



[Item No.: 890-929](#)
h-distribution connector; 5-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 2 locking levers; black



[Item No.: 890-930](#)
h-distribution connector; 5-pole; Cod. A; 1 input; 2 outputs; outputs on one side; 3 locking levers; for flying leads; black



[Item No.: 890-621](#)
T-distribution connector; 5-pole; Cod. A; 1 input; 2 outputs; 2 locking levers; black



[Item No.: 890-622](#)
T-distribution connector; 5-pole; Cod. A; 1 input; 2 outputs; 3 locking levers; for flying leads; black



1.1.3 Female connector/socket



Item No.: 890-705
Snap-in socket; 5-pole; Cod. A; 1,50 mm²; black



Item No.: 890-705/006-000
Snap-in socket; without locking lever; 5-pole; Cod. A; 1,50 mm²; black



Item No.: 890-805/011-000
Socket for PCBs; angled; 5-pole; Cod. A; black



Item No.: 890-805
Socket for PCBs; straight; 5-pole; Cod. A; black



Item No.: 890-205
Socket; 5-pole; Cod. A; 1,50 mm²; black



Item No.: 890-105
Socket; with strain relief housing; 5-pole; Cod. A; 1,50 mm²; black

1.2 Required Accessories

1.2.1 Locking system

1.2.1.1 Locking system



Item No.: 890-111
Locking lever; for flying leads; for tool operation; black



Item No.: 890-131
Locking lever; for flying leads; for tool operation; white



Item No.: 890-101
Locking lever; for manual operation; black



Item No.: 890-121
Locking lever; for manual operation; white

1.3 Optional Accessories

1.3.1 Cover

1.3.1.1 Cover



Item No.: 897-2003
Protective cap; Type2; for sockets and plugs; PVC; red

1.3.2 Installation

1.3.2.1 Mounting accessories



Item No.: 890-310
Mounting carrier; 2- to 5-pole; for flying leads; black



Item No.: 890-311
Mounting carrier; 2- to 5-pole; for flying leads; white

1.3.3 Shield termination

1.3.3.1 Shield termination



Item No.: 890-527
Shield connecting plate; 5-pole; for plugs

1.3.4 Tool

1.3.4.1 Operating tool




Item No.: 890-385
Operating tool; 5-way; green




Item No.: 210-719
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

Installation Notes


Conductor termination




1. Strip length, outer insulation = 30 mm (2-pole), 37 mm (3-pole), 45 mm (4- and 5-pole)
2. Strip length = 9 mm
3. Extended ground conductor = 8 mm



To terminate fine-stranded conductors, open the clamping unit via screwdriver – 2.5 mm blade width – and insert a stripped conductor until it hits the backstop. Terminate solid conductors by simply pushing them in.




To terminate fine-stranded conductors, open clamping units via operating tool (890-382) and insert stripped conductors until they hit backstop. Terminate solid conductors by simply pushing them in.



To terminate fine-stranded conductors, open clamping units via operating tool (890-383) and insert stripped conductors until they hit backstop. Terminate solid conductors by simply pushing them in.

Installation




Latch the wired connector into the base of the strain relief housing.



Push down strain relief clamp by hand.



Push down strain relief clamp with 2.5 mm screwdriver alternately on both sides.



Latch the top of the strain relief housing.



The printed marking of the connector is clearly visible in the openings of the strain relief housing.

Shield termination



Connector with shield termination



Apply the shield to the sheathed cable.
Strip length, outer insulation = 30 mm
Shield length = 8 mm



Push the shield connecting plate into the connector until fully inserted.



First insert the wired connector into strain relief housing, then snap clamp and cover.