



Data Sheet | Item Number: 890-703

Snap-in socket; 3-pole; Cod. A; 1,50 mm²; black


<https://www.wago.com/890-703>

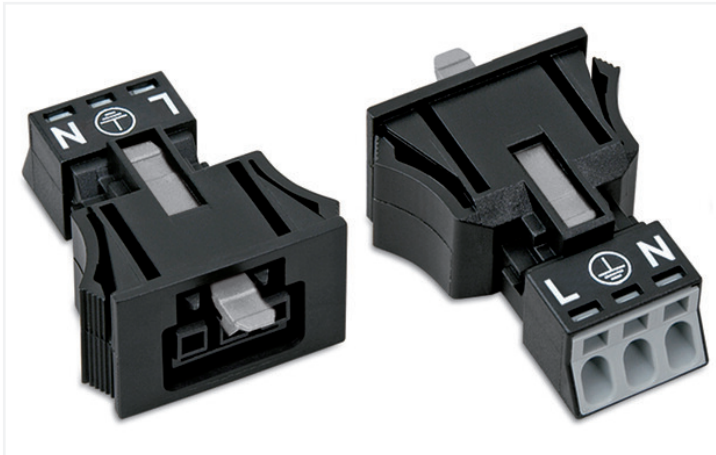

Color: ■ black

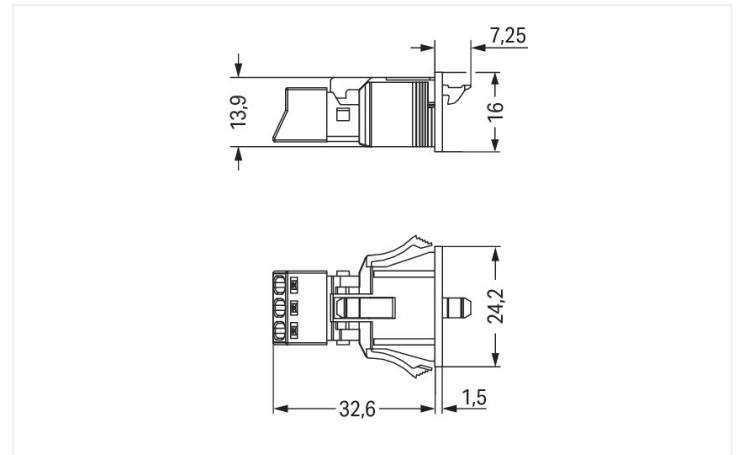

Dimensions in mm

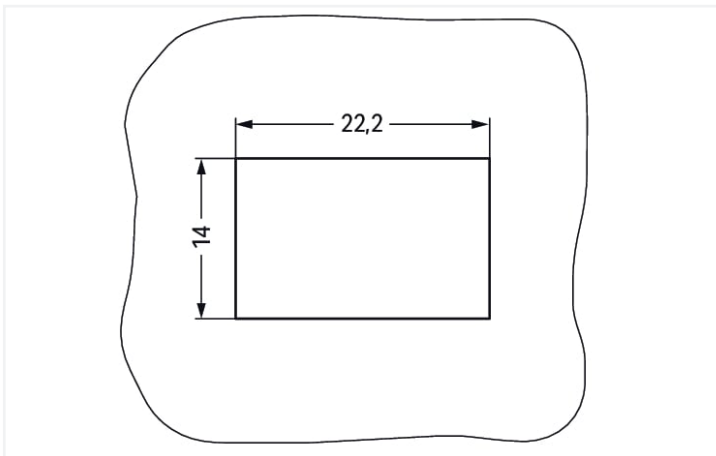

Dimensions in mm

Plate thickness: 0.5 ... 2 mm

Cutout tolerance: + 0.1 mm

Please note!

Female connector/socket WINSTA® MINI rated current 16 A

The WINSTA® MINI female connector/socket rated current 16 A supports rapid, correct installation. On PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to establish connections according to an enormous variety of requirements in seconds. The coding options reduce installation errors, allowing fast, maintenance-free wiring of all components. The pluggable installation connector is protected against ingress by solid granular objects with a diameter below 1 mm in accordance with protection type IP40. General mains applications for almost any domain of use can be realised with WINSTA® MINI pluggable installation connectors with A coding. WINSTA® MINI is our response to the trend toward miniaturisation. Our smallest pluggable connection system is especially suitable for lights, for example, since as a result of LED technology; due to complex systems, these offer significantly less space for the connection technology.

WINSTA® MINI solutions for your electrical installation – protected against mismatching and maintenance-free

The WINSTA® Pluggable Connection System is ideally tailored to the strict requirements of building installation. It makes electrical installation pluggable, and consequently more efficient, even more reliable, and error-free. Use of this pre-assembled system reduces time spent on assembly and installation errors at the construction site. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection type IP40 from WAGO.

- pluggable installation connectors with protection against mismatching
- consistent IP40 protection
- with A coding for a great number of uses
- custom-engineered solutions
- quick replacement of defective units during ongoing operation

Notes	
Note	<p>The snap-in connectors must be relieved of tensile and transverse forces.</p> <p>A surface finish can influence the edge radius of the cutouts. This may affect the snap-in socket fit, so ensure an adequate fit before use. In addition, the punched edge should be on the inside for punched cutouts.</p> <p>The wings of the snap-in connectors must not be mechanically stressed for a long period before use (e.g., due to a pre-locking position).</p>

Electrical data								
Ratings per		IEC/EN 60664-1			Approvals per		UL 1977	
Overvoltage category		III	III	II	Rated voltage		600 V	
Pollution degree		3	2	2	Rated current		14 A	
Nominal voltage		250 V	-	-				
Rated surge voltage		4 kV	-	-				
Rated current		16 A	-	-				
General information								
Note on contact resistance		approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/ socket						

Connection data																												
Connection points	3	<div>Connection 1</div> <table><tr><td>Connection technology</td><td>Push-in CAGE CLAMP®</td></tr><tr><td>Actuation type</td><td>Operating tool Push-in</td></tr><tr><td>Nominal cross-section</td><td>1.5 mm² / 16 AWG</td></tr><tr><td>Solid conductor</td><td>0.25 ... 1.5 mm² / 22 ... 16 AWG</td></tr><tr><td>Solid conductor; push-in termination</td><td>0.75 ... 1.5 mm² / 20 ... 16 AWG</td></tr><tr><td>Stranded conductor</td><td>0.25 ... 1 mm² / 22 ... 18 AWG</td></tr><tr><td>Fine-stranded conductor</td><td>0.25 ... 1.5 mm² / 22 ... 16 AWG</td></tr><tr><td>Fine-stranded conductor; with insulated ferrule</td><td>0.25 ... 0.75 mm² / 22 ... 20 AWG</td></tr><tr><td>Fine-stranded conductor; with uninsulated ferrule</td><td>0.25 ... 0.75 mm² / 22 ... 20 AWG</td></tr><tr><td>Fine-stranded conductor; with ferrule; push-in termination</td><td>0.75 mm² / 20 AWG</td></tr><tr><td>Strip length</td><td>9 mm / 0.35 inches</td></tr><tr><td>Pole number</td><td>3</td></tr><tr><td>Conductor entry direction to mating direction</td><td>0 °</td></tr></table>	Connection technology	Push-in CAGE CLAMP®	Actuation type	Operating tool Push-in	Nominal cross-section	1.5 mm² / 16 AWG	Solid conductor	0.25 ... 1.5 mm² / 22 ... 16 AWG	Solid conductor; push-in termination	0.75 ... 1.5 mm² / 20 ... 16 AWG	Stranded conductor	0.25 ... 1 mm² / 22 ... 18 AWG	Fine-stranded conductor	0.25 ... 1.5 mm² / 22 ... 16 AWG	Fine-stranded conductor; with insulated ferrule	0.25 ... 0.75 mm² / 22 ... 20 AWG	Fine-stranded conductor; with uninsulated ferrule	0.25 ... 0.75 mm² / 22 ... 20 AWG	Fine-stranded conductor; with ferrule; push-in termination	0.75 mm² / 20 AWG	Strip length	9 mm / 0.35 inches	Pole number	3	Conductor entry direction to mating direction	0 °
Connection technology	Push-in CAGE CLAMP®																											
Actuation type	Operating tool Push-in																											
Nominal cross-section	1.5 mm² / 16 AWG																											
Solid conductor	0.25 ... 1.5 mm² / 22 ... 16 AWG																											
Solid conductor; push-in termination	0.75 ... 1.5 mm² / 20 ... 16 AWG																											
Stranded conductor	0.25 ... 1 mm² / 22 ... 18 AWG																											
Fine-stranded conductor	0.25 ... 1.5 mm² / 22 ... 16 AWG																											
Fine-stranded conductor; with insulated ferrule	0.25 ... 0.75 mm² / 22 ... 20 AWG																											
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 0.75 mm² / 22 ... 20 AWG																											
Fine-stranded conductor; with ferrule; push-in termination	0.75 mm² / 20 AWG																											
Strip length	9 mm / 0.35 inches																											
Pole number	3																											
Conductor entry direction to mating direction	0 °																											
Total number of potentials	3																											

Physical data	
Pin spacing	4.4 mm / 0.173 inches
Width	24.2 mm / 0.953 inches
Height	16 mm / 0.63 inches
Depth	39.85 mm / 1.569 inches



Mechanical data		
Application	General mains applications	
Coding	A	
Variable coding	No	
Marking	L N	
Potential marking	L N	
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)	
Retention force of a plug-in connection	Locked: > 80 N	
Unmating force of a plug-in connection	Unlocked: approx. 20 ... 70 N (depending on pole number)	
Number of mating cycles	200, without resistive load	
Housing sheet thickness	0.5 ... 2 mm / 0.02 ... 0.079 inches	
Mounting type	Snap-in flange	
Protection type	IP40	

Plug-in connection		
Contact type (pluggable connector)	Female connector/socket	
Connector (connection type)	for conductor	
Mismating protection	Yes	
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole	
Locking lever	Yes	
Locking of plug-in connection	Locking lever	
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).	

Material data		
Note (material data)	Information on material specifications can be found here	
Color	black	
Cover color	gray	
Material group	I	
Insulation material	Polyamide (PA66)	
Flammability class per UL94	V0	
Clamping spring material	Chrome-nickel spring steel (CrNi)	
Contact material	Copper or copper alloy; surface-treated	
Contact plating	Tin	
Fire load	0.221 MJ	
Weight	6.1 g	


Environmental requirements		
Processing temperature	-5 ... +40 °C	
Continuous operating temperature	-35 ... +85 °C	
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C	




Commercial data		
Product Group	20 (Winsta)	
eCl@ss 10.0	27-44-06-02	
eCl@ss 9.0	27-44-06-02	
ETIM 8.0	EC002566	
ETIM 7.0	EC002566	
PU (SPU)	50 (50) pcs	
Packaging type	Box	
Country of origin	PL	
GTIN	4045454233419	
Customs tariff number	85366990990	

Environmental Product Compliance		
RoHS Compliance Status	Compliant, No Exemption	

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
			Approval	Standard	Certificate Name
Approval	Standard	Certificate Name	EU-Declaration of Confor-		
CCA	EN 61535	71-123231	mity	-	-
DEKRA Certification B.V.			WAGO GmbH & Co. KG		
CCA	IEC 61535	NL-85020	UK-Declaration of Confor-		
DEKRA Certification B.V.			mity	-	-
cURus	UL 1977	E45171	WAGO GmbH & Co. KG		
Underwriters Laboratories Inc.					

Approvals for marine applications		
		
Approval	Standard	Certificate Name
ABS	Steel Vessel Rules	19-HG1869855-PDA
American Bureau of Ship-		
ping		
DNV GL	-	TAE00001Z6
Det Norske Veritas, Ger-		
manischer Lloyd		
LR	EN 61535	08/20047 (E2)
Lloyds Register		



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 890-703

↓

Documentation

Bid Text			
890-703	19.02.2019	xml 2.91 KB	↓
890-703	30.11.2018	doc 23.00 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models 890-703

↓

CAE data

EPLAN Data Portal 890-703

↓

WSCAD Universe 890-703

↓


ZUKEN Portal 890-703

↓


1 Compatible Products

1.1 System counterpart

1.1.1 Cable assembly




Item No.: 891-8993/205-101
pre-assembled connecting cable; Eca; Plug/open-ended; 3-pole; Cod. A; 1 m; 1,00 mm²; black




Item No.: 891-8993/005-101
pre-assembled interconnecting cable; Eca; Socket/plug; 3-pole; Cod. A; 1 m; 1,00 mm²; black

1.1.2 Male connector/plug



Item No.: 890-213
Plug; 3-pole; Cod. A; 1,50 mm²; black



Item No.: 890-113
Plug; with strain relief housing; 3-pole; 1,50 mm²; black

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



Item No.: 890-643
Lockout cap; 3-pole; for cutouts; Plastic; black



Item No.: 890-693
Lockout cap; 3-pole; for cutouts; Plastic; white

1.2.2 Tool

1.2.2.1 Operating tool




Item No.: 890-383
Operating tool; 3-way; green




Item No.: 210-719
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

Installation Notes


Conductor termination



- 1. Strip length, outer insulation = 30 mm (2-pole), 37 mm (3-pole), 45 mm (4- and 5-pole)
- 2. Strip length = 9 mm
- 3. Extended ground conductor = 8 mm



To terminate fine-stranded conductors, open the clamping unit via screwdriver – 2.5 mm blade width – and insert a stripped conductor until it hits the backstop. Terminate solid conductors by simply pushing them in.



To terminate fine-stranded conductors, open clamping units via operating tool (890-382) and insert stripped conductors until they hit backstop. Terminate solid conductors by simply pushing them in.

