



Color: ■ light gray

Similar to illustration

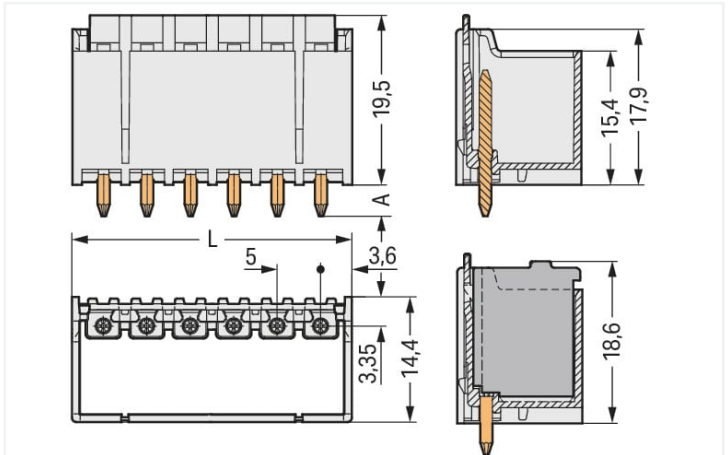

Dimensions in mm  
 $L = (\text{pole no.} \times \text{pin spacing}) + 2.2 \text{ mm}$   
 $A = 3.6 \text{ mm THT solder pin}$   
 $A = 2.4 \text{ mm THR solder pin}$

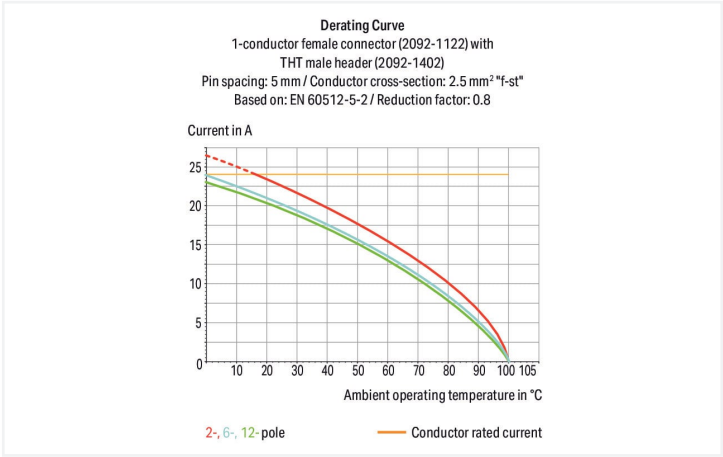

- Assembly of female connectors without loss of poles, allowing different functions to be divided within one male header ( $\geq 4$  poles)
- Coding pins inserted into the header interface prevent mismatching, allowing subsequent coding in panel feedthrough applications
- The female connector is fully shrouded by the male header's housing, providing vibration resistance up to 20 g

Notes			
Safety information		The <b>picoMAX® Pluggable Connection System</b> includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.	
Variants:		Direct marking Other versions (or variants) can be requested from WAGO Sales or configured at <a href="https://configurator.wago.com/">https://configurator.wago.com/</a> .	

Electrical data			
Ratings per		IEC/EN 60664-1	
Overvoltage category		III	II
Pollution degree		3	2
Nominal voltage		250 V	630 V
Rated surge voltage		4 kV	4 kV
Rated current		16 A	16 A
Approvals per		UL 1059	
Use group		B	D
Rated voltage		300 V	300 V
Rated current		15 A	10 A



Connection data		
Total number of potentials	4	Connection 1
Number of connection types	1	
Number of levels	1	
		Pole number 4

Physical data		
Pin spacing	5 mm / 0.197 inches	
Width	22.2 mm / 0.874 inches	
Height	23.1 mm / 0.909 inches	
Height from the surface	19.5 mm / 0.768 inches	
Depth	14.4 mm / 0.567 inches	
Solder pin length	3.6 mm	
Solder pin diameter	1.4 mm	
Drilled hole diameter with tolerance	1.6 <sup>(+0.1)</sup> mm	

Mechanical data		
Variable coding	Yes	
Anti-rotation protection	Yes	

Plug-in connection		
Contact type (pluggable connector)	Male connector/plug	
Connector (connection type)	for PCB	
Mismating protection	No	
Plugging without loss of pin spacing	Yes	
Mating direction to the PCB	90 °	
Locking of plug-in connection	Locking latch	

PCB contact		
PCB contact	THT	

Material data		
Note (material data)	<a href="#">Information on material specifications can be found here</a>	
Color	light gray	
Material group	I	
Insulation material	Polyphthalamide (PPA GF)	
Flammability class per UL94	V0	
Contact material	Electrolytic copper (E <sub>Cu</sub> )	
Contact plating	Tin	
Fire load	0.054 MJ	
Weight	2.6 g	



Environmental requirements	
Limit temperature range	-60 ... +100 °C
Processing temperature	-35 ... +60 °C

Commercial data	
Product Group	26 (picoMAX Connectors)
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 8.0	EC002637
ETIM 7.0	EC002637
PU (SPU)	200 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821163855
Customs tariff number	85366930000

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

### Approvals / Certificates

#### General approvals



Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-49737/A1
CSA DEKRA Certification B.V.	C22.2	2362521
CSA DEKRA Certification B.V.	C22.2 No. 158	2362521
cURus Underwriters Laboratories Inc.	UL 1059	E45172
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-102261 REV.2
UL Underwriters Laboratories Inc.	UL 1977	E45171

### Downloads


#### Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 2092-1404	



Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	

CAD/CAE-Data


CAD data
2D/3D Models 2092-1404


CAE data
ZUKEN Portal 2092-1404


PCB Design
Symbol and Footprint via SamacSys 2092-1404

Symbol and Footprint via Ultra Librarian 2092-1404


Installation Notes

Coding



Coding a male header (via coding key carrier and two keys for male header, see symbol).