

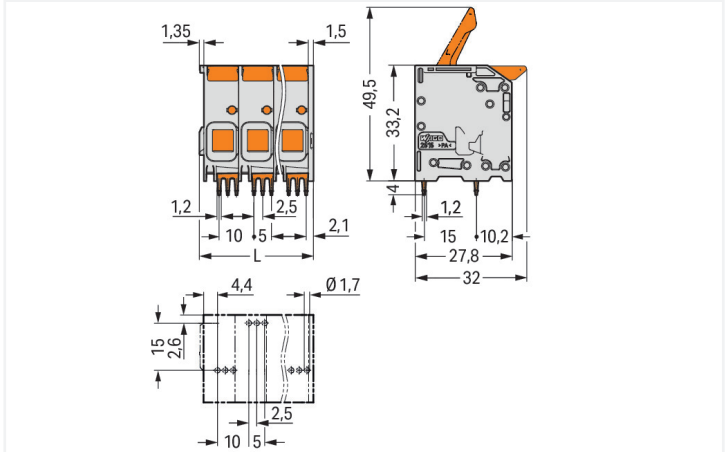


Color: ■ gray

Similar to illustration

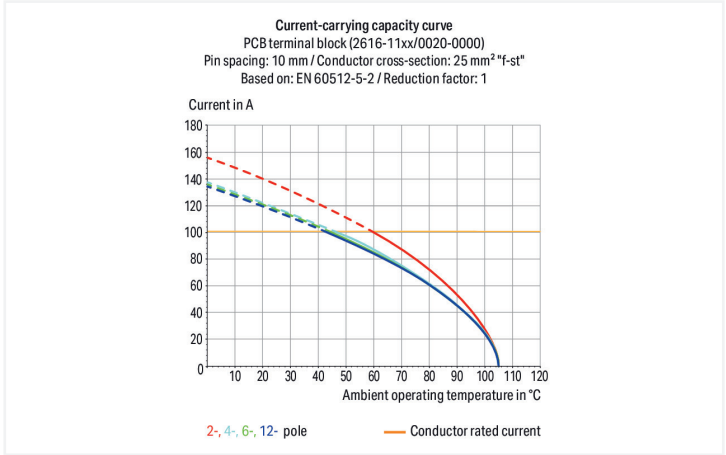

Dimensions in mm  
L = (pole no. – 1) x pin spacing + 12.8 mm

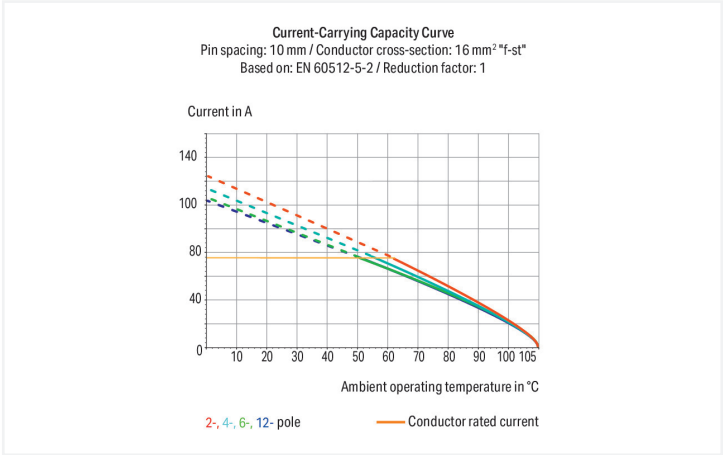

- PCB terminal blocks with Push-in CAGE CLAMP® connection and levers
- Push-in termination of solid and ferruled conductors
- Intuitive and tool-free operation
- Several clamping units can be held open simultaneously, simplifying the connection of multi-core cables
- Testing can be performed both parallel and perpendicular to conductor entry

Notes	
Variants:	Other colors Other versions (or variants) can be requested from WAGO Sales or configured at <a href="https://configurator.wago.com/">https://configurator.wago.com/</a> . Other pole numbers Direct marking

Electrical data			
Ratings per		IEC/EN 60664-1	
Overvoltage category		III	II
Pollution degree		3	2
Nominal voltage		1000 V	1000 V
Rated surge voltage		8 kV	8 kV
Rated current		76 A	76 A
Approvals per		UL 1059	
Use group		B	D
Rated voltage		600 V	-
Rated current		66 A	-



Approvals per		CSA	
Use group	B	C	D
Rated voltage	600 V	600 V	-
Rated current	66 A	66 A	-

Connection data			
Connection points	3	Connection 1	
Total number of potentials	3	Connection technology	Push-in CAGE CLAMP®
Number of connection types	1	Actuation type	Lever
Number of levels	1	Solid conductor	0.75 ... 16 mm² / 18 ... 4 AWG
		Fine-stranded conductor	0.75 ... 25 mm² / 18 ... 4 AWG
		Fine-stranded conductor; with insulated ferrule	0.75 ... 16 mm²
		Fine-stranded conductor; with uninsulated ferrule	0.75 ... 16 mm²
		Fine-stranded conductor; with twin ferrule	0.75 ... 6 mm²
		Strip length	18 ... 20 mm / 0.71 ... 0.79 inches
		Conductor connection direction to PCB	0 °
		Pole number	3

Physical data		
Pin spacing	10 mm / 0.394 inches	
Width	32.8 mm / 1.291 inches	
Height	37.2 mm / 1.465 inches	
Height from the surface	33.2 mm / 1.307 inches	
Depth	32 mm / 1.26 inches	
Solder pin length	4 mm	
Solder pin dimensions	1.2 x 1.2 mm	
Drilled hole diameter with tolerance	1.7 <sup>(+0.1)</sup> mm	

PCB contact		
PCB contact	THT	
Solder pin arrangement	over the entire terminal strip (staggered)	
Number of solder pins per potential	3	

Material data		
Note (material data)	<a href="#">Information on material specifications can be found here</a>	
Color	gray	
Material group	I	
Insulation material	Polyamide (PA66)	
Flammability class per UL94	V0	
Clamping spring material	Chrome-nickel spring steel (CrNi)	
Contact material	Electrolytic copper (E <sub>Cu</sub> )	
Contact plating	Tin	
Fire load	0.441 MJ	
Actuator color	orange	
Weight	28.5 g	



Environmental requirements	
Limit temperature range	-60 ... +105 °C
Processing temperature	-35 ... +60 °C

Commercial data	
ETIM 8.0	EC002643
ETIM 7.0	EC002643
PU (SPU)	40 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143869607
Customs tariff number	85369010000

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CSA DEKRA Certification B.V.	C22.2	70154737

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 2616-1103/010-000	

Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	



CAD/CAE-Data	
PCB Design	
Symbol and Footprint via SamacSys 2616-1103/010-000	
Symbol and Footprint via Ultra Librarian 2616-1103/010-000	

1 Compatible Products
1.1 Optional Accessories
1.1.1 Ferrule
1.1.1.1 Ferrule



[Item No.: 216-284](#)  
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



[Item No.: 216-289](#)  
Ferrule; Sleeve for 10 mm² / AWG 8; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



[Item No.: 216-210](#)  
Ferrule; Sleeve for 16 mm² / AWG 6; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



[Item No.: 216-286](#)  
Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



[Item No.: 216-287](#)  
Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray




[Item No.: 216-288](#)  
Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow

1.1.2 Jumper
1.1.2.1 Jumper




[Item No.: 2616-902](#)  
Jumper; for conductor entry; 2-way; insulated; gray

Installation Notes
Conductor termination



Insert fine-stranded conductors – and remove all conductors – via operating tool.

Conductor termination



Insert solid conductors via push-in termination.