


## Data Sheet | Item Number: 734-602


Strain relief housing; for female and male connectors; 2 parts; Pin spacing 3.5 mm;  
2-pole; light gray

<https://www.wago.com/734-602>

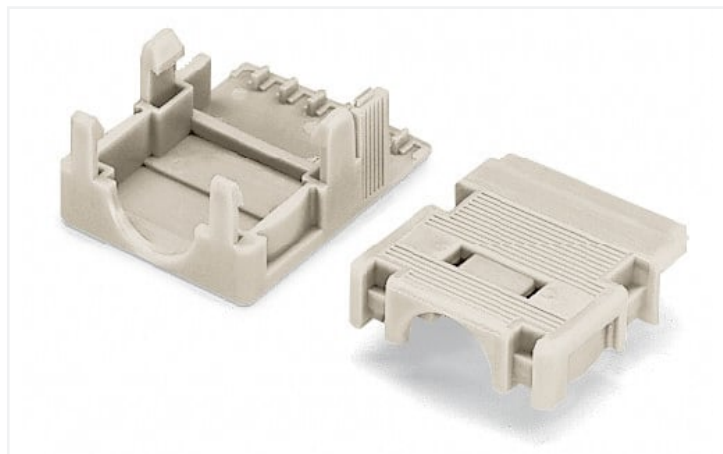

Color: ■ light gray

Similar to illustration

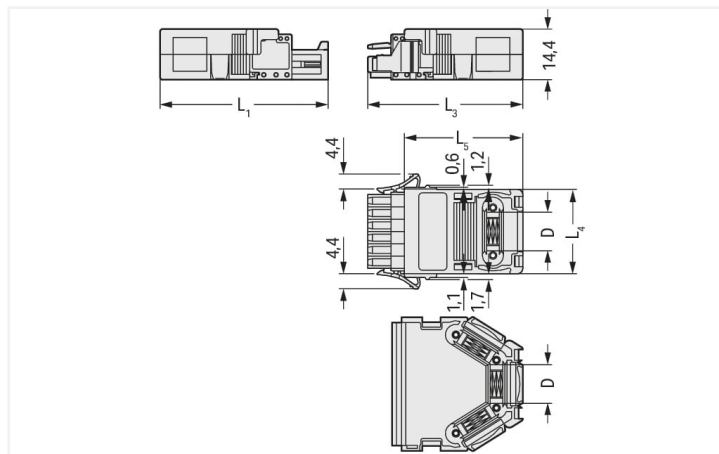

Dimensions in mm

### Strain Relief Housing Dimensions (in mm):

Pole No.	L4	L3	L1	L5	D
2	10.0	43.1	46.8	32.7	5.0
3	13.5	43.1	46.8	32.7	8.5
4	17.0	43.1	46.8	32.7	8.5
5	20.5	43.1	46.8	32.7	8.5
6	24.0	44.1	47.8	33.7	11.5
7	27.5	44.1	47.8	33.7	11.5
8	31.0	44.1	47.8	33.7	11.5
9	34.5	44.1	47.8	33.7	11.5
10	38.0	53.1	56.8	42.7	11.5
11	41.5	53.1	56.8	42.7	11.5
12	45.0	53.1	56.8	42.7	11.5

- Only for use with cable binders
- Cable binder width: max. 3.6 mm
- 1 x cable outlet, rear

### Connection data

#### Connection 1

Pole number 2

### Physical data

Pin spacing	3.5 mm / 0.138 inches
Width	10 mm / 0.394 inches
Height	14.4 mm / 0.567 inches
Depth	32.7 mm / 1.287 inches

### Mechanical data

Suitable for standard male and female connectors

### Material data

Note (material data)

[Information on material specifications can be found here](#)

Color light gray

Material group I

Insulation material Polyamide (PA66)

Flammability class per UL94 V0

Fire load 0.056 MJ

Weight 1.8 g

### Commercial data

Product Group 3 (Multi Conn. System)

eCl@ss 10.0 27-44-04-92

eCl@ss 9.0 27-44-04-92

ETIM 8.0 EC002848

ETIM 7.0 EC002848

PU (SPU) 50 pcs

Packaging type Box

Country of origin DE

GTIN 4017332590754

Customs tariff number 39269097900

### Environmental Product Compliance

RoHS Compliance Status Compliant, No Exemption

### Approvals / Certificates

#### General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	2169534.02
CCA DEKRA Certification B.V.	EN 61984	nl-54190

#### Approvals for marine applications



Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	-	19-HG1869876-PDA
DNV DNV GL SE	-	TAE000016Z
LR Lloyds Register	IEC 61984	96/20035 (E5)

## Downloads

### Environmental Product Compliance

#### Compliance Search

Environmental Product  
Compliance 734-602



## Documentation

### Additional Information

Technical Section

03.04.2019

pdf

2027.26 KB



## CAD/CAE-Data

### CAD data

2D/3D Models 734-602



### CAE data

EPLAN Data Portal  
734-602




ZUKEN Portal 734-602




## Installation Notes

### Application



4-pole, 1-conductor female connector, with locking levers and strain relief housing (2- to 5-pole strain relief housing suitable only for cable ties)

### Application



8-pole; 1-conductor male connector; with strain relief housing (6- to 12-pole strain relief housings suitable for cable clamp)