
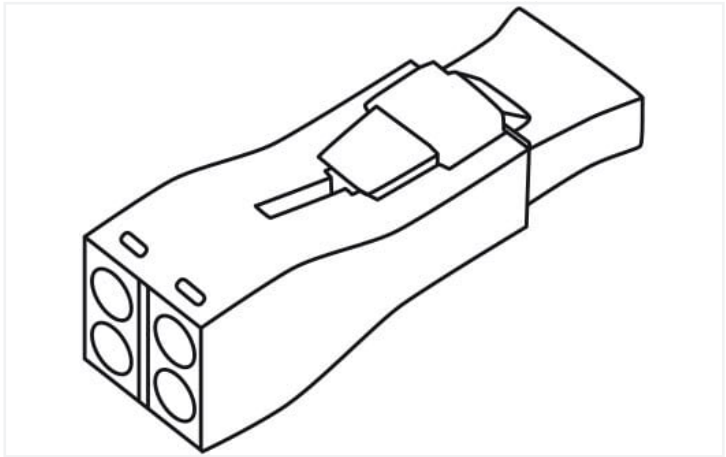


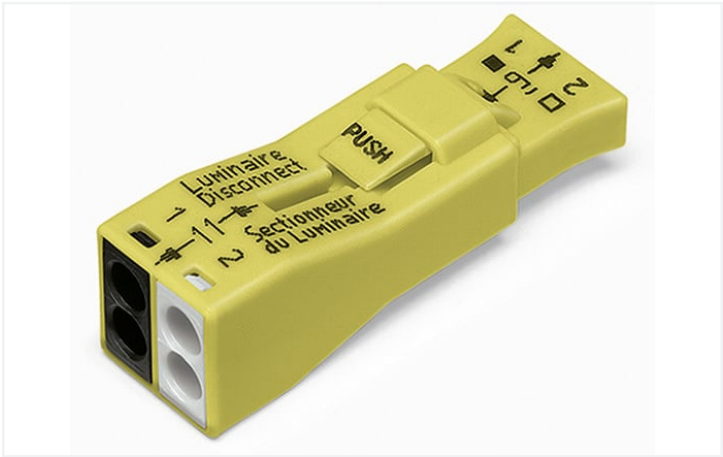

Color: ■ yellow

Electrical data				
Ratings per		EN 60998		
Overvoltage category	III	III	II	
Pollution degree	3	2	2	
Nominal voltage	-	-	400 V	
Rated surge voltage	-	-	4 kV	
Rated current	-	-	6 A	

Ratings per		EN 61984		
Overvoltage category	III	III	II	
Pollution degree	3	2	2	
Nominal voltage	-	-	-	
Rated surge voltage	-	-	-	
Rated current	-	-	-	

Connection data				
Connection points	6	Connection 1		
Total number of potentials	2	Connection type 1	Plug	
		Connection technology	PUSH WIRE®	
		Actuation type	Push-in	
		Connectable conductor materials	Copper	
		Solid conductor	16 ... 12 AWG	
		Stranded conductor	16 ... 12 AWG	
		Strip length	11 ... 13 mm / 0.43 ... 0.51 inches	
		Pole number	2	

Connection 2	
Connection type 2	Socket
Solid conductor 2	18 AWG
Strip length 2	9 ... 11 mm / 0.35 ... 0.43 inches



Physical data	
Width	13 mm / 0.512 inches
Height	13.2 mm / 0.52 inches
Depth	42 mm / 1.654 inches

Material data	
Note (material data)	Information on material specifications can be found here
Color	yellow
Fire load	0.103 MJ
Weight	4.8 g

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 8.0	EC000458
ETIM 7.0	EC000458
PU (SPU)	400 (40) pcs
Packaging type	Box
Country of origin	CN
GTIN	4045454548421
Customs tariff number	85366990990

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
			Approval	Standard	Certificate Name
CCA	EN 61984	NTR NL-7390	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA	EN 61984	2178521.01	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA	EN 60998	71-114174			
CCA	EN 60998	NTR NL-7391			
CSA	C22.2 No. 182.3	1961671			
UL	UL 2459	E313353			



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 873-902

↓

Documentation

Bid Text				
873-902	19.02.2019	xml	3.11 KB	↓
873-902	21.02.2019	docx	14.78 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models 873-902

↓

CAE data

ZUKEN Portal 873-902

↓