
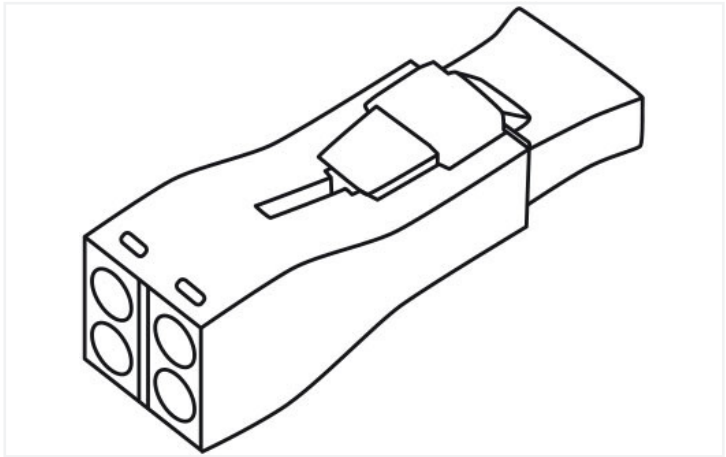


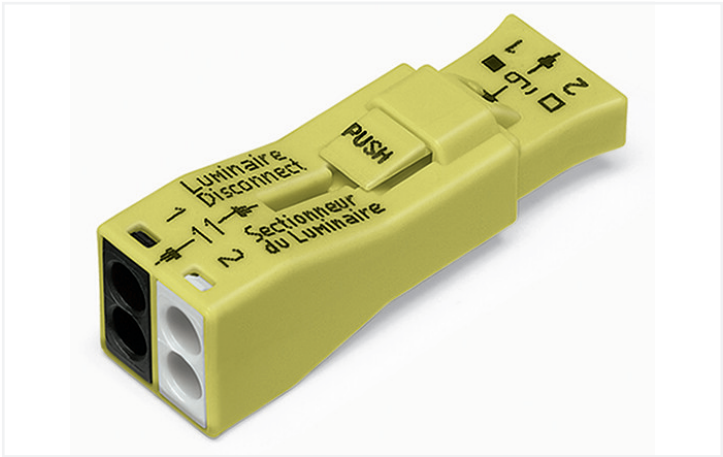

Color: ■ yellow

Electrical data

Ratings per		EN 60998		
Overvoltage category	III	III	II	
Pollution degree	3	2	2	
Nominal voltage	-	-	400 V	
Rated surge voltage	-	-	4 kV	
Rated current	-	-	6 A	

Ratings per		EN 61984		
Overvoltage category	III	III	II	
Pollution degree	3	2	2	
Nominal voltage	-	-	-	
Rated surge voltage	-	-	-	
Rated current	-	-	-	

Connection data

Connection points	6
Total number of potentials	2

Connection 1	
Connection type 1	Plug
Connection technology	PUSH WIRE®
Actuation type	Push-in
Connectable conductor materials	Copper
Solid conductor	16 ... 12 AWG
Stranded conductor	16 ... 12 AWG
Strip length	11 ... 13 mm / 0.43 ... 0.51 inches
Pole number	2

Connection 2	
Connection type 2	Socket
Solid conductor 2	18 AWG
Strip length 2	9 ... 11 mm / 0.35 ... 0.43 inches

Physical data	
Width	13 mm / 0.512 inches
Height	13.2 mm / 0.52 inches
Depth	42 mm / 1.654 inches

Material data	
Note (material data)	Information on material specifications can be found here
Color	yellow
Fire load	0.103 MJ
Weight	4.8 g

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 8.0	EC000458
ETIM 7.0	EC000458
PU (SPU)	400 (40) pcs
Packaging type	Box
Country of origin	CN
GTIN	4045454548421
Customs tariff number	85366990990

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
			Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	NTR NL-7390	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	EN 61984	2178521.01	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	EN 60998	71-114174			
CCA DEKRA Certification B.V.	EN 60998	NTR NL-7391			
CSA DEKRA Certification B.V.	C22.2 No. 182.3	1961671			
UL UL International Germany GmbH	UL 2459	E313353			



Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance 873-902			↓

Documentation

Bid Text			
873-902	19.02.2019	xml 3.11 KB	↓
873-902	21.02.2019	docx 14.78 KB	↓

CAD/CAE-Data

CAD data	
2D/3D Models 873-902	↓

CAE data	
ZUKEN Portal 873-902	↓